

Specifications: OTB-388 Series

Features:

- Thru-Panel Barrier Construction
- UL & CUL Recognized
- Cover Included
- M6 Screws
- High Current – Rated for 100A
- Accepts # 2 AWG Wire

Electrical:

Current: 100A @ 600V
 Wire Range: 2- 8 AWG
 IR: >10 (500V DC)
 Operating temp: -40°C - +90°C

Materials:

Housing: PBT (UL 94V-O)
 Terminal: Brass, Ni plated
 Screw: M6 Steel, Ni plated
 Positions Available: 2-15

Specifications: OTB-489 Series

Features:

- Thru-Panel Barrier Construction
- UL Recognized
- Cover Included
- M6 Screws
- High Current – Rated for 130A
- Accepts # 1 AWG Wire



Electrical:

Current: 130A @ 660V
 Wire Range: 1 - 4 AWG
 IR: >10 (500V DC)
 Operating temp: -40°C - +90°C




Materials:

Housing: PBT (UL 94V-O)
 Terminal: Brass, Ni plated
 Screw: M6 Steel, Ni plated
 Positions Available: 2-12

100A 600V 21 mm (.827")

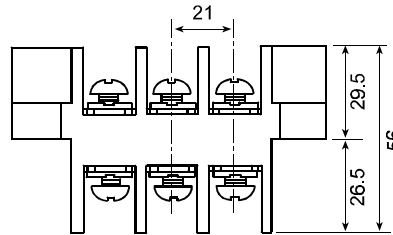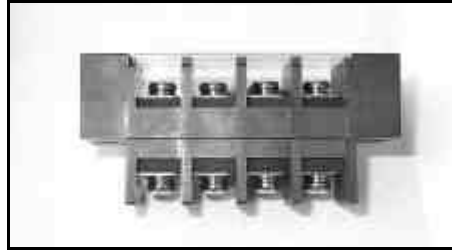


130A 660V 27 mm (1.063")

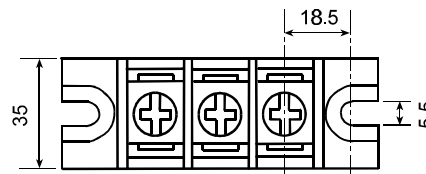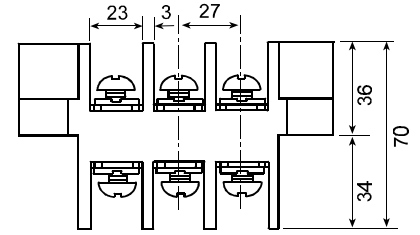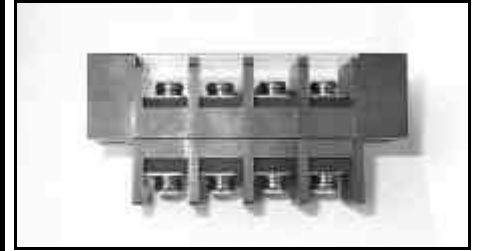

Dimensions

n= number of poles
 $L=(nx21) + 29$


Ordering Information

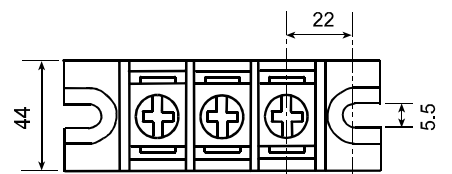

Dimensions

n= number of poles
 $L=(nx27) + 30$

Ordering Information



Distributed by: [Electro-Stock, Inc. sales@electrostock.com](http://www.electrostock.com)
<http://www.electrostock.com> 630-682-1542 Fax: 630-682-1562