

Specifications: **OTB-910 Series**

Features:

- Barrier Construction
- UL Recognized
- Two Pins Per Pole
- Optional Cover Available
- With or Without Mounting Ears
- Vertical or Right Angle Mount
- High Current – Rated for 60A
- Accepts # 6 AWG Wire





Electrical:

Current: 60A @ 600V
 Wire Range: 6 AWG
 Pin Dimension: 4.5mm x 1.2mm
 IR: >10 (1000V DC)
 Operating temp: -40°C - +90°C

Materials:

Housing: PBT (UL 94V-O)
 Terminal: Brass tin-plated
 Screw: M5 Steel, Ni plated
 Positions Available: 2-20


60A 600V 16 mm (.630")

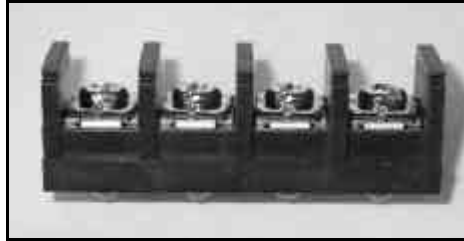




Dimensions

n= number of poles
 $A=(n \times 16) + 3.4$

Ordering Information

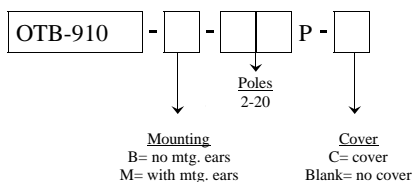


60A 600V 16 mm (.630")



Dimensions

n= number of poles
 $A=(n \times 16) + 3.4$

Ordering Information

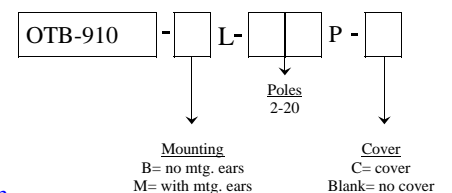

Distributed by: [Electro-Stock, Inc. sales@electrostock.com](http://www.electrostock.com)
<http://www.electrostock.com> 630-682-1542 Fax: 630-682-1562