

Specifications: **OULP-947 Series**

Features:

- Tri-Barrier Construction
- UL Recognized
- M4 Screws
- High Current – Rated for 30A

Electrical:

Current: 30A @ 300V
 Wire Range: 10 - 12 AWG
 Pin Dimension: 2mm x 1mm
 IR: >10 (1000V DC)
 Operating temp: -40°C - +90°C

Materials:

Housing: PBT (UL 94V-O)
 Terminal: Brass tin-plated
 Screw: M4 Steel, Ni plated
 Positions Available: 2-25

Specifications: **OULP-948 Series**

Features:

- Tri-Barrier Construction
- Staggered Pin Configuration
- High Voltage – Rated for 600V
- UL Recognized
- M4 Screws
- High Current – Rated for 30A





Electrical:

Current: 30A @ 600V
 Wire Range: 10 - 12 AWG
 Pin Dimension: 2mm x 1mm
 IR: >10 (1000V DC)
 Operating temp: -40°C - +90°C
 To

Materials:

Housing: PBT (UL 94V-O)
 Terminal: Brass tin-plated
 Screw: M4 Steel, Ni plated
 Positions Available: 2-25


30A 300V 11 mm (.433")

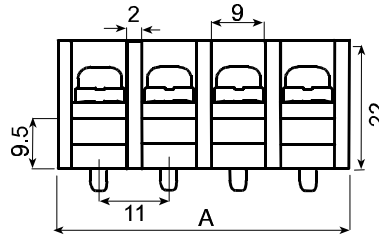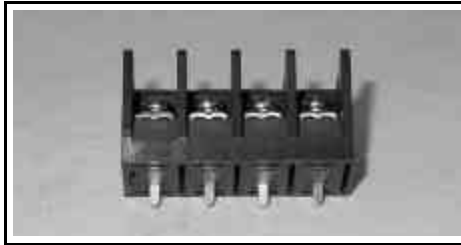

Dimensions




n= number of poles
 A=(nx11) + 2

Ordering Information



Mounting
 B= no mtg. ears
 M= with mtg. ears


30A 600V 11 mm (.433")

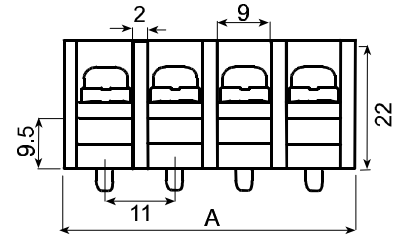

Dimensions

n= number of poles
 A=(nx11) + 2

Ordering Information



Mounting
 B= no mtg. ears
 M= with mtg. ears

Distributed by: Electro-Stock, Inc. sales@electrostock.com
<http://www.electrostock.com> 630-682-1542 Fax: 630-682-1562