


2.54mm HEADER FEMALE

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

- FEED-THROUGH CONTACT LENGTH OPTIONS
- EXTENDED HEIGHT RECEPTACLES
- FOUR HEIGHTS AVAILABLE
- SINGLE, DUAL, AND TRIPLE ROW

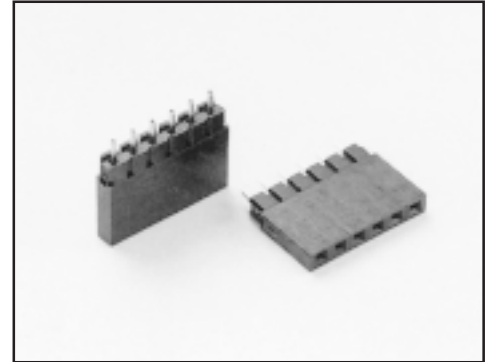

SPECIFICATION:

INSULATOR MATERIAL:
GLASS FILLED THERMOPLASTIC
POLYESTER

FLAMMABILITY RATING:
UL 94V-0

INSULATION RESISTANCE:
1000 MEGOHMS MIN. AT 500V DC

OPERATING TEMPERATURE RANGE:
-40° C TO +105° C

DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR 1 MINUTE

CONTACT MATERIAL:
PHOSPHOR BRONZE

CURRENT RATING:
3 AMPS

CONTACT RESISTANCE:
20 MILLIOHMS MAX. AT 1A DC


ORDER INFORMATION:

C622R XX - X - X - X
1 2 3 4 5

- 1: **SERIES** C622R EXTENDED HEIGHT RECEPTACLE, 2.54mm SPACING
- 2: **NUMBER OF CONTACTS**
03 TO 40 – SINGLE ROW
06 TO 80 – DUAL ROW
09 TO 120 – TRIPLE ROW
- 3: **CONTACT ARRANGEMENT CODE**
S...SINGLE ROW
D...DUAL ROW
T...TRIPLE ROW
- 4: **DIMENSION CODE**
SEE TABLE
- 5: **CONTACT PLATING**
0...TIN
6...SELECTIVE GOLD FLASH
8...SELECTIVE 15u" GOLD

CODE NO.	DIMENSION (mm)	
	A	B
10	11.05	2.30
20	11.05	7.35
30	11.05	12.20
40	13.59	4.85
50	13.59	9.65
60	16.13	2.30
70	16.13	7.10
80	18.67	4.60

DIMENSION INFORMATION

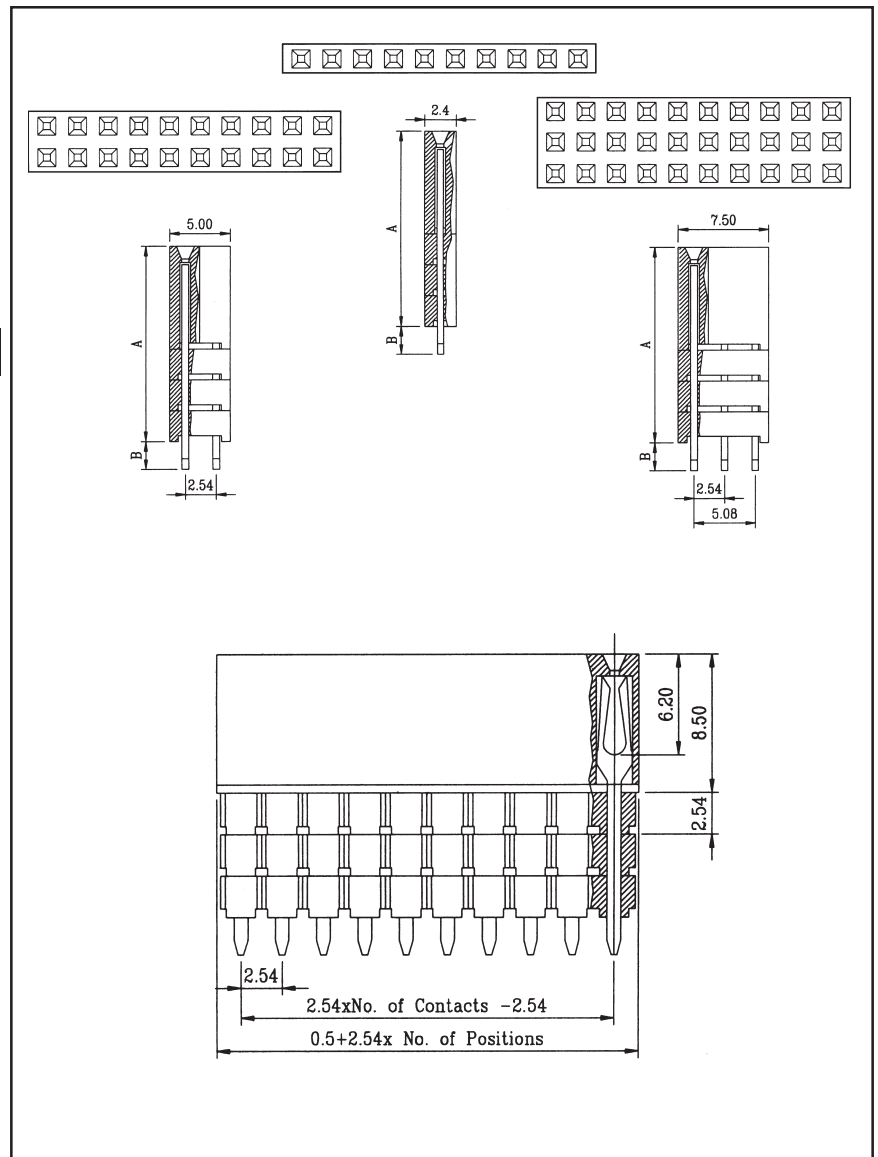

DRAWING