

2.00mm HEADER FEMALE

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

- SINGLE, DOUBLE ROW
- STRAIGHT, RIGHT ANGLE
- DIP TYPE

SPECIFICATION:

INSULATOR MATERIAL:
GLASS FILLED THERMOPLASTIC
POLYESTER (BLACK)

FLAMMABILITY RATING:
UL 94V-0

INSULATION RESISTANCE:
1000 MEGOHMS MIN. AT 500V DC

OPERATING TEMPERATURE RANGE:
-40° C TO +105° C



DIELECTRIC STRENGTH:
500V AC FOR 1 MINUTE

CONTACT MATERIAL:
PHOSPHOR BRONZE

CONTACT PLATING:
SEE ORDER INFORMATION

CURRENT RATING:
3 AMPS

CONTACT RESISTANCE:
20 MILLIOHMS MAX. AT 1A DC

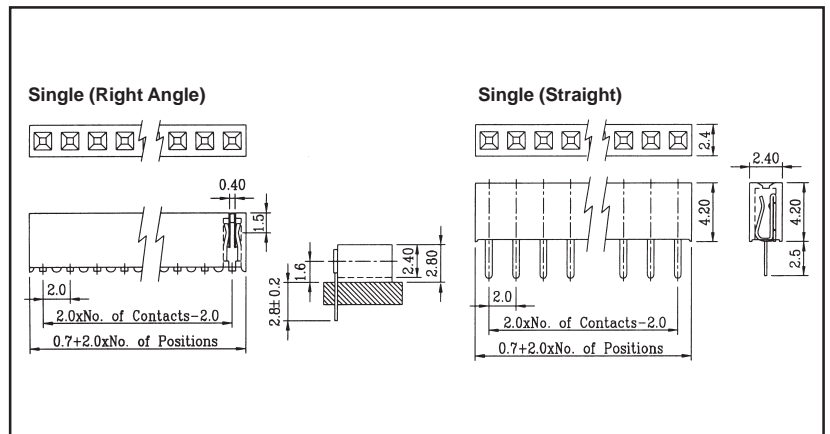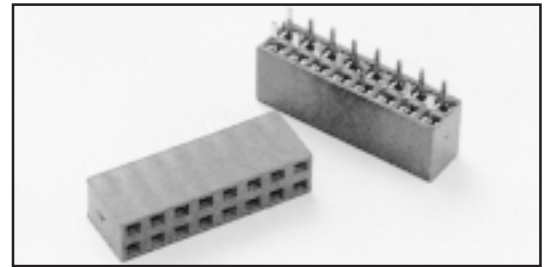


SINGLE ROW - DRAWING


ORDER INFORMATION:

CPRM XX - X - X - X
1 2 3 4 5

- 1: **SERIES** CPRM THROUGH BOARD RECEPTACLE,
2.00mm SPACING
- 2: **NUMBER OF CONTACTS**
02 TO 40 - SINGLE ROW
04 TO 80 - DUAL ROW
- 3: **CONTACT ARRANGEMENT CODE**
D...DUAL ROW
S...SINGLE ROW
- 4: **SOLDER TAIL**
R...RIGHT ANGLE
S...STRAIGHT
- 5: **CONTACT PLATING**
0...TIN
1...GOLD FLASH
6...SELECTIVE GOLD FLASH
9...30u" SELECTIVE GOLD

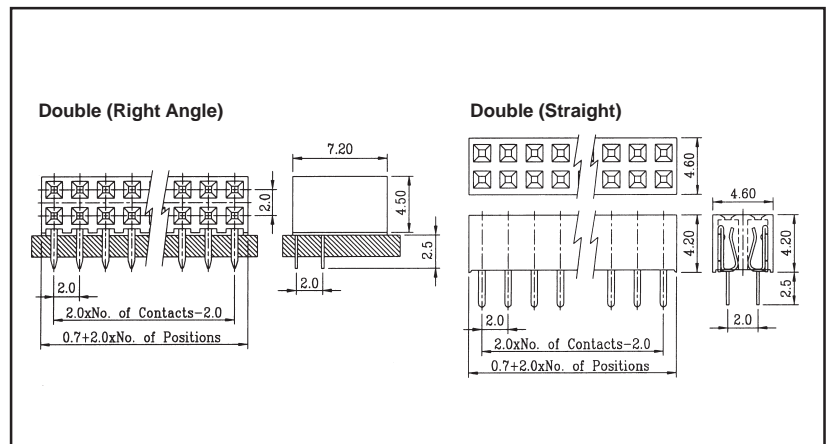

DOUBLE ROW - DRAWING

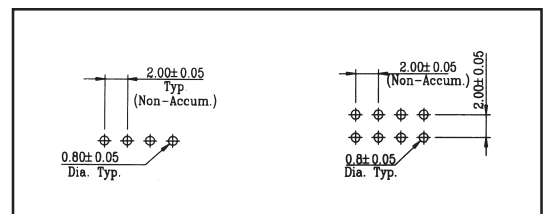

P.C.B. LAYOUT