

2.00mm HEADER FEMALE

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

- ULTRA LOW PROFILE
- DOUBLE ROW
- SMT TYPE, W/POST
- TOP ENTRY

SPECIFICATION:

INSULATOR MATERIAL:

GLASS FILLED THERMOPLASTIC
POLYESTER (BLACK)

FLAMMABILITY RATING:

UL 94V-0

INSULATION RESISTANCE:

1000 MEGOHMS MIN. AT 500V DC

OPERATING TEMPERATURE RANGE:

-40° C TO +105° C

DIELECTRIC STRENGTH:

500V AC FOR 1 MINUTE

CONTACT MATERIAL:

PHOSPHOR BRONZE

CONTACT PLATING:



SEE ORDER INFORMATION

CURRENT RATING:

3 AMPS

CONTACT RESISTANCE:

20 MILLIOHMS MAX. AT 1A DC

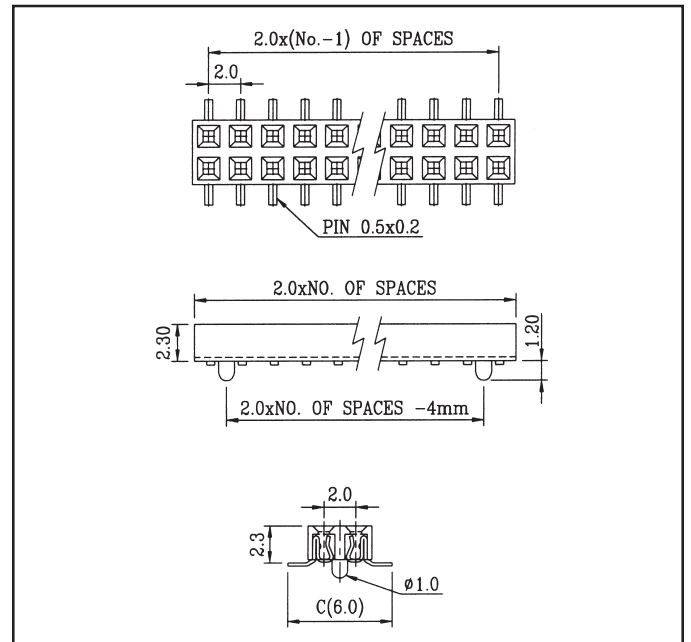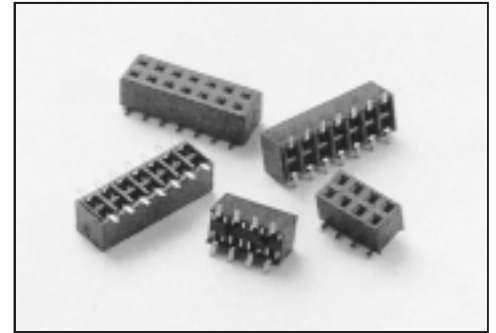


DRAWING

ORDER INFORMATION:

CPRMSL XX - D - X - X
1 2 3 4 5

- 1: SERIES** CPRMSL LOW PROFILE
SURFACE MOUNT RECEPTACLE,
2.00mm SPACING
- 2: NUMBER OF CONTACTS**
04 TO 64 - CONTACTS
- 3: CONTACT ARRANGEMENT CODE**
D...DUAL ROW ONLY
- 4: POST AND PACKAGE OPTIONS**
 - 0...WITHOUT POST, TUBE PACKAGING
 - 1...WITH 0.64mm D/A POST, TUBE PACKAGING
 - 2...WITHOUT POST, TAPE AND REEL PACKAGING
 - 3...WITH 0.64mm D/A POST, TAPE AND REEL PACKAGING
- 5: CONTACT PLATING**
 - 0...TIN/LEAD
 - 1...GOLD FLASH
 - 6...SELECTIVE GOLD FLASH
 - 9...30u" SELECTIVE GOLD

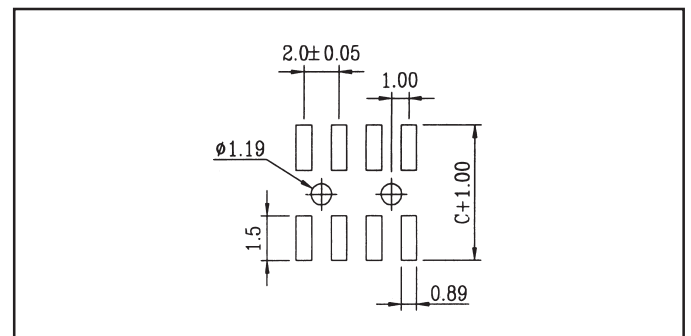

P.C.B. LAYOUT