



DIN 41612 CONNECTORS

TYPE M: FEMALE, PRESS-FIT


CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com



ORDERING INFORMATION

C134 - XX - 1 - XX - XX - L
1 2 3 4 5 6


- 1...Series Type M DIN 41612 connectors, female, press-fit
- 2...Number of Contacts
 - 24...24 (rows A, B and C) +8 signal contacts
 - 42...42 (rows A, B and C) +6 signal contacts
 - 60...60 (rows A, B and C) +4 signal contacts
 - 78...78 (rows A, B and C) +2 signal contacts
- 3...Connector Type
 - 1...Female
- 4...Contact Configuration (Dimension C)
 - 50...5.0mm compliant pin press-fit
 - 60...13.0mm compliant pin press-fit
 - 70...17.0mm compliant pin press-fit
- 5...Contact Plating Class
 - 10...Class III, tin/lead tail
 - 20...Class II, tin/lead tail
- 6...Option
 - Blank...Through-hole mounting
 - A... Board locks

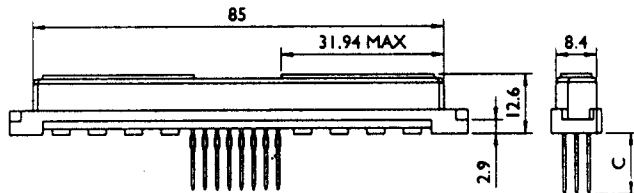


PCB LAYOUT

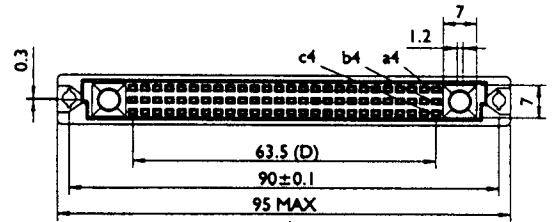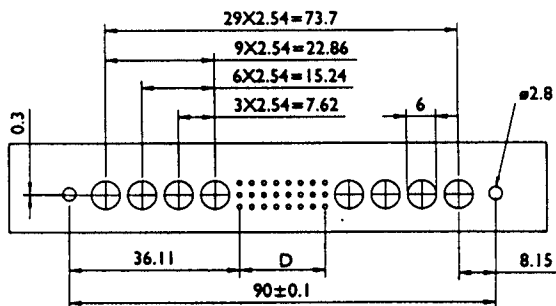


78 SIGNAL CONTACT LAYOUT

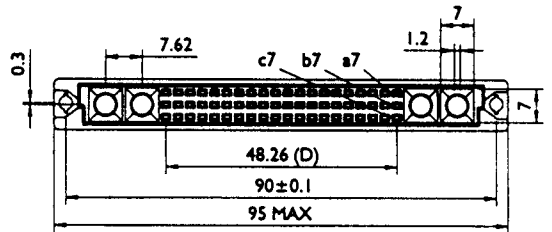

60 SIGNAL CONTACT LAYOUT

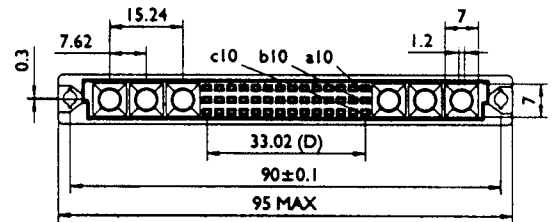

42 SIGNAL CONTACT LAYOUT

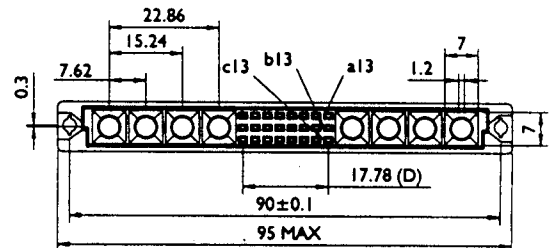

24 SIGNAL CONTACT LAYOUT


Contact Arrangement (viewed from termination side)




78+2



60+4



42+6



24+8