



D-SUB, HIGH DENSITY, CRIMP



CENTURY INTERCONNECT PRODUCTS (203) 362-1371 FAX (203) 362-1375

ORDERING INFORMATION



C4D 26 S 1 A

1 2 3 4 5

- 1... **Series** High density crimp
D-sub connector
- 2... **Number of Contacts**
15, 26, 44, 62
- 3... **Contact Type**
P... Plug
S... Socket
- 4... **Metal Shell Finish**
1... Tin (standard)
2... Yellow Chromate
- 5... **Mounting Options**
See page A-36

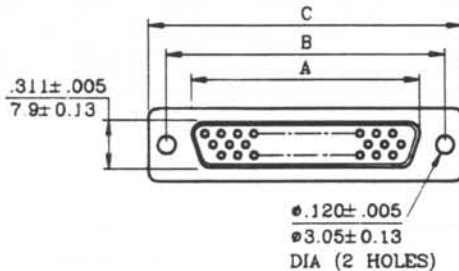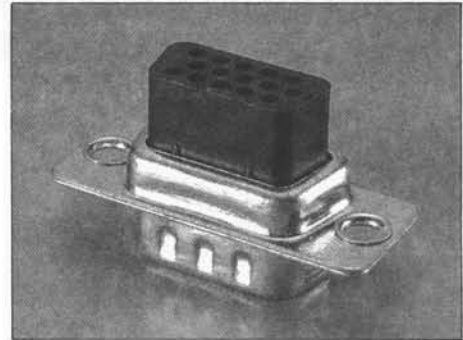

SHELL SIZE	No. of Contact Positions	A ±0.010 ±0.25	B ±0.005 ±0.13	C ±0.015 ±0.38	D ±0.010 ±0.25	E ±0.015 ±0.38
E	15	<u>0.643</u> 16.33	<u>0.984</u> 24.99	<u>1.213</u> 30.81	<u>0.759</u> 19.28	<u>0.429</u> 10.90
A	26	<u>0.971</u> 24.66	<u>1.312</u> 33.32	<u>1.541</u> 39.14	<u>1.083</u> 27.51	<u>0.429</u> 10.90
B	44	<u>1.511</u> 38.38	<u>1.852</u> 47.04	<u>2.088</u> 53.04	<u>1.625</u> 41.28	<u>0.429</u> 10.90
C	62	<u>2.159</u> 54.84	<u>2.500</u> 63.50	<u>2.729</u> 69.32	<u>2.272</u> 57.71	<u>0.429</u> 10.90

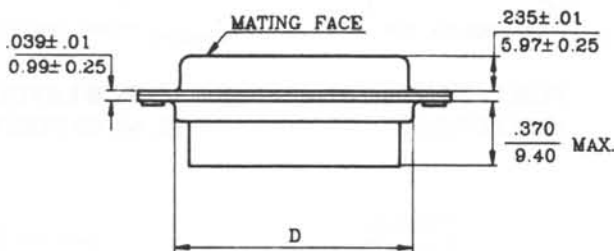

CRIMP CONTACTS (SUPPLIED ON 10,000 PIECE REELS)

- C4DM28/24** Male Contacts, 28-24 AWG, Selective Gold Flash Plating
- C4DF28/24** Female Contacts, 28-24 AWG, Selective Gold Flash Plating

CONSULT FACTORY FOR OTHER CONTACT PLATING OPTIONS