



STACKED D-SUB CONNECTORS

THREE STANDARD SIZE D-SUB CONNECTORS



CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

ORDERING INFORMATION

C3DT - 25S - 9P - 9P - 8 - B - X - X - _
1 2 3 4 5 6 7 8 9

- 1...Series** C3DT Stacked connector with three standard size D-sub connectors
- 2...Upper Connector**
25S...25 position socket
- 3...Lower Left Connector**
9P...9 position plug
- 4...Lower Right Connector**
9P...9 position plug
- 5...Connector Spacing**
8... .750" spacing
- 6...Mounting Options**
B...Boardlocks
- 7...Mating Options**
A...4-40 threaded inserts
B...4-40 threaded inserts with jackscrew
- 8...Footprint Option**
1...Footprint number 1 (standard)
2...Footprint number 2
- 9...Plating Options**
Blank...selective gold flash
(consult factory for other plating options)

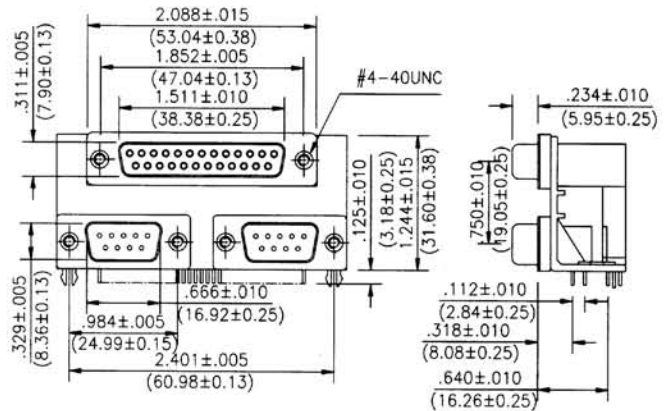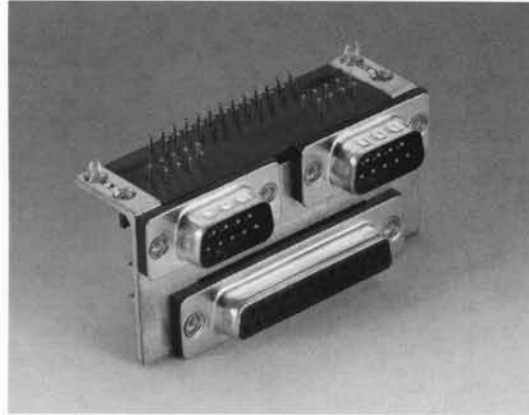


SPECIFICATIONS

ELECTRICAL:

- Current Rating:** 5 amps
- Contact Resistance:** 35 milliohms max.
- Insulation Resistance:** 1000 megohms min.
- Dielectric Withstanding Voltage:** 500V AC
- Operating Voltage:** 500V

MECHANICAL:

- Contact Material:** Phosphor bronze
- Contact Plating:** See ordering information
- Insulator Material:** PBT thermoplastic, 30% glass filled, black color
- Flammability Rating:** UL94V-0
- Durability:** 500 mating cycles
- Contact Engagement Force:** 12 oz. max.
- Contact Separation Force:** 0.75 oz. min.

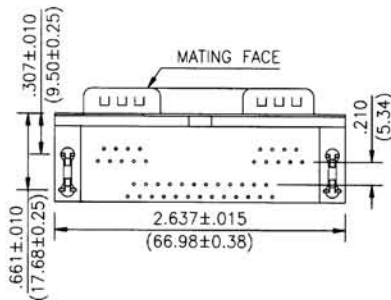

PCB Layout

