



D-SUB CONNECTOR, STRAIGHT PCB

HIGH PROFILE

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

ORDERING INFORMATION

C8DH 25 S 1 A _ _
1 2 3 4 5 6 7

1 ... Series

C8DH ... Straight PCB D-sub,
high profile

2 ... Number of Contacts

09, 15, 25, 37

3 ... Contact Type

P ... Plug

S ... Socket

4 ... Metal Shell Finish

1 ... Tin, grounding indents on
plug only

2 ... Yellow chromate

5 ... Mounting Options

See page A-36


6 ... Plating Options

Blank ... selective gold flash


7 ... Ferrite Option

Blank ... ferrite not required


F ... ferrite, machined contacts,
full gold flash plating

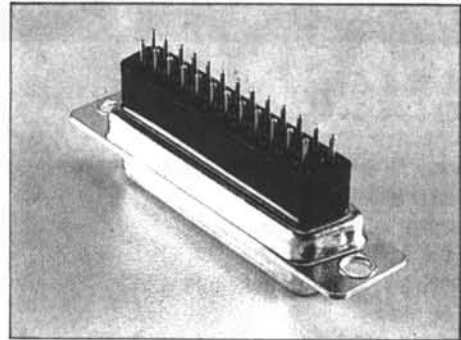

SHELL SIZE	A ± 0.010 ± 0.25	B ± 0.005 ± 0.13	C ± 0.015 ± 0.38	D ± 0.010 ± 0.25	E ± 0.015 ± 0.38
9 (E)	0.643 16.33	0.984 24.99	1.213 30.81	0.759 19.28	0.429 10.90
15 (A)	0.971 24.66	1.313 33.32	1.541 39.14	1.083 27.51	0.429 10.90
25 (B)	1.511 38.38	1.852 47.04	2.088 53.04	1.625 41.28	0.429 10.90
37 (C)	2.159 54.84	2.500 63.50	2.729 69.32	2.272 57.71	0.429 10.90




WITHOUT FERRITE

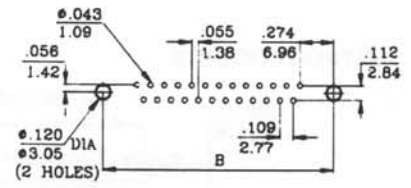

PCB LAYOUT

WITH FERRITE

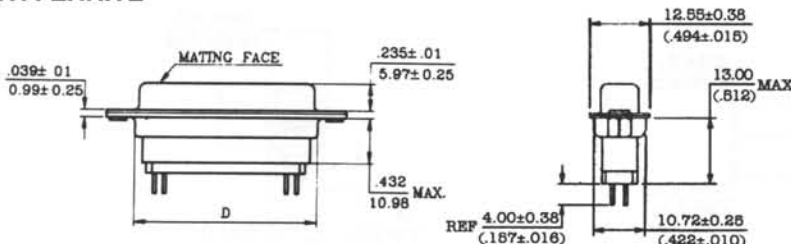

FERRITE SPECIFICATIONS

MEASUREMENT	TEST FREQUENCY
20 ohms min.	30 MHz
30 ohms min.	50 MHz
50 ohms min.	100 MHz