



FPC SOCKET

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

ORDERING INFORMATION

CFC1 - XX - X - T

1 2 3 4

1...Series CFC1...FPC Socket, .100 spacing

2...Number of Contacts

2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14,
15, 16, 17, 18, 19, 20, 21

3...Mounting Style

S...Straight



R...Right angle

4...Plating


T...Tin



STRAIGHT

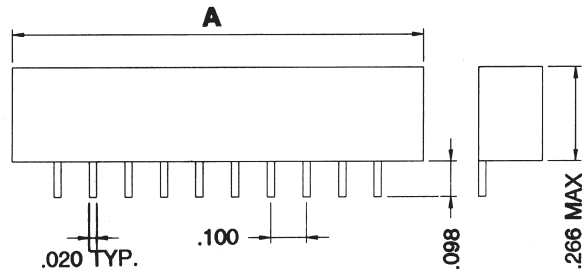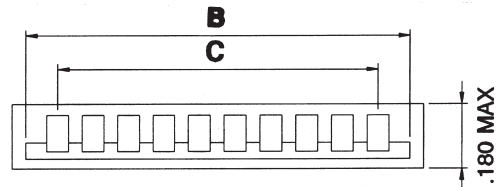

RIGHT ANGLE

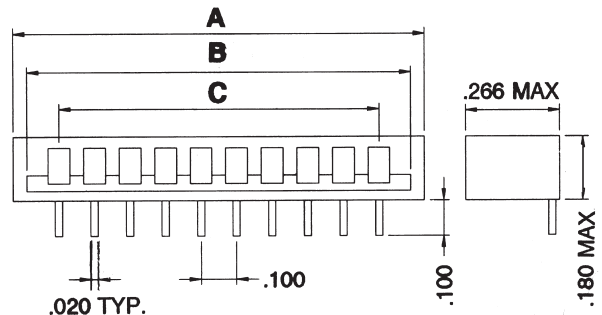

SPECIFICATIONS

ELECTRICAL:

Current Rating: 1 amp

Contact Resistance: 20 milliohms max.

Insulation Resistance: 5000 megohms min.

Dielectric Withstanding Voltage: 1000V AC

Operating Temperature Range: -55 degrees C to
+105 degrees C

Operating Voltage: 200V AC

MECHANICAL:

Contact Material: Phosphor bronze

Contact Plating: Tin

Insulator Material: Thermoplastic polyester

Flammability Rating: UL94V-0

NO. OF CONTACTS	A	B	C	NO. OF CONTACTS	A	B	C
2	.400	.306	.100	12	1.400	1.306	1.100
3	.500	.406	.200	13	1.500	1.406	1.200
4	.600	.506	.300	14	1.600	1.506	1.300
5	.700	.605	.400	15	1.700	1.606	1.400
6	.800	.706	.500	16	1.800	1.706	1.500
7	.900	.805	.600	17	1.900	1.804	1.600
8	1.000	.906	.700	18	2.000	1.906	1.700
9	1.100	1.006	.800	19	2.100	2.006	1.800
10	1.199	1.106	.900	20	2.200	2.106	1.900
11	1.300	1.202	1.000	21	2.300	2.206	2.000