



# FFC/FPC CONNECTORS, ZIF, SURFACE MOUNT

## 1.00 mm SPACING

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com  
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

### ORDERING INFORMATION

**CFC8 - XX - I - X - I**  
1 2 3 4 5

1...Series CFC8 FFC/FPC connector, ZIF, surface mount, 1.00mm spacing

2...Number of Contacts  
04 to 32 contacts

3...Cable Entry Style  
T...Top entry

4...Packaging Options  
T...Tube  
R...Tape and Reel

5...Contact Plating  
T...Tin



### SPECIFICATIONS

#### ELECTRICAL:

**Current Rating:** 1 amp

**Contact Resistance:** 30 milliohms max.

**Dielectric Strength:** 50V AC min.





**Operating Temperature Range:**  
-40 degrees C to +105 degrees C

#### MECHANICAL:

**Contact Material:** Copper alloy

**Contact Plating:** Tin over nickel

**Insulator Material:** Thermoplastic,  
UL94V-0

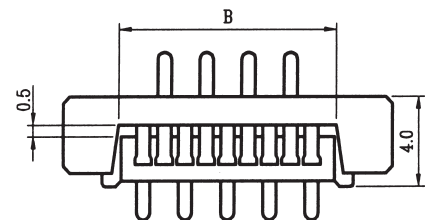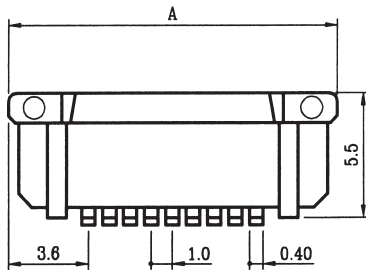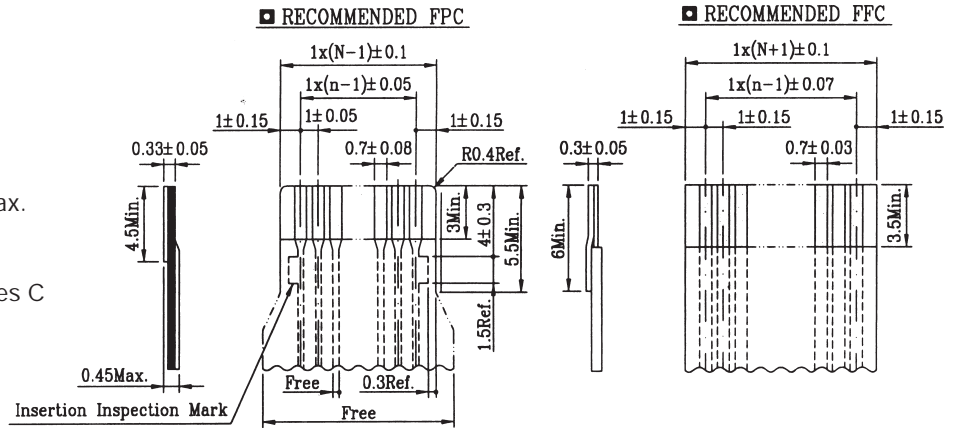

Terminal code	Dimensions(mm)		Terminal code	Dimensions(mm)		Terminal code	Dimensions(mm)	
	A	B		A	B		A	B
4	10.2	5.2	15	21.2	16.2	26	32.2	27.2
5	11.2	6.2	16	22.2	17.2	27	33.2	28.2
6	12.2	7.2	17	23.2	18.2	28	34.2	29.2
7	13.2	8.2	18	24.2	19.2	29	35.2	30.2
8	14.2	9.2	19	25.2	20.2	30	36.2	31.2
9	15.2	10.2	20	26.2	21.2	31	37.2	32.2
10	16.2	11.2	21	27.2	22.2	32	38.2	33.2
11	17.2	12.2	22	28.2	23.2			
12	18.2	13.2	23	29.2	24.2			
13	19.2	14.2	24	30.2	25.2			
14	20.2	15.2	25	31.2	26.2			

