



IDC 2 ROW TRANSITION CONNECTOR

2.00mm SPACING

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

ORDERING INFORMATION

C11F XX 1 X

1 2 3 4

1...Series C11F IDC 2 row transition connector, 2.00mm spacing

2...Number of Contacts

10, 12, 16, 20, 24, 26, 30, 34, 40, 44, 50


3...Color Code

1...Black

4...Plating Options

0...Selective gold flash

T...Tin

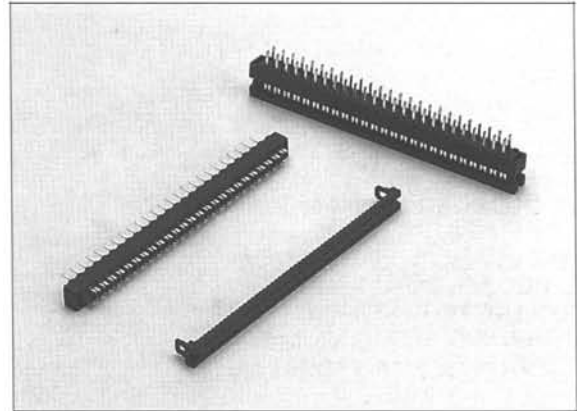

SPECIFICATIONS

ELECTRICAL:

Current Rating: 1 amp

Contact Resistance: 30 milliohms max.

Insulation Resistance: 1000 megohms min. at 500V DC

Dielectric Withstanding Voltage: 500V AC for 1 minute

Operating Temperature Range: -65 degrees C to +105 degrees C

MECHANICAL:

Contact Material: Phosphor bronze

Contact Plating: See ordering information

Insulator Material: Thermoplastic polyester

Flammability Rating: UL94V-0

