




BOX HEADER, .050" SPACING

CENTURY INTERCONNECT PRODUCTS (203) 375-5344 FAX (203) 362-1375

ORDERING INFORMATION

C20H - XX - X - 1 - X
 1 2 3 4 5

- 1...Series C20H Box header, through board, .050" spacing
- 2...Number of Contacts
10, 20, 30, 40, 50, 60, 70, 80, 90, 100
- 3...Contact Configuration
S...Straight
R...Right angle
- 4...Insulator Color Code
1...Black
- 5...Plating Options
1...Gold flash (right angle only)
6...Selective gold flash (straight only)

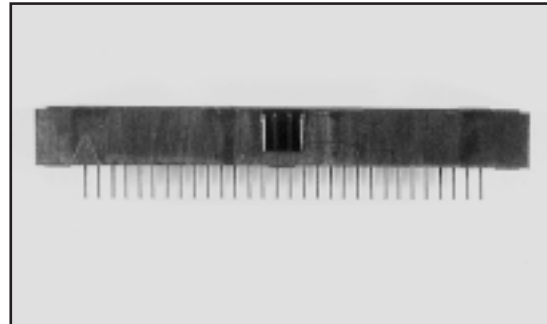

SPECIFICATIONS

ELECTRICAL:


- Current Rating:** 1 amp DC
- Contact Resistance:** 30 milliohms max. at 6V DC 0.3A
- Insulation Resistance:** 1000 megohms min. at 500V DC
- Dielectric Withstanding Voltage:** 500V AC for one minute
- Operating Temperature Range:** -40 degrees C to +105 degrees C

MECHANICAL:

- Contact Material:** Phosphor bronze
- Contact Plating:** See ordering information
- Insulator Material:** Glass fiber reinforced PBT
- Flammability Rating:** UL94V-0

NO. OF CONTACTS	A	B	NO. OF CONTACTS	A	B
10	.550	.220	60	1.800	1.450
20	.800	.450	70	2.050	1.700
30	1.050	.700	80	2.300	1.950
40	1.300	.950	90	2.550	2.200
50	1.550	1.200	100	2.815	2.454

STRAIGHT

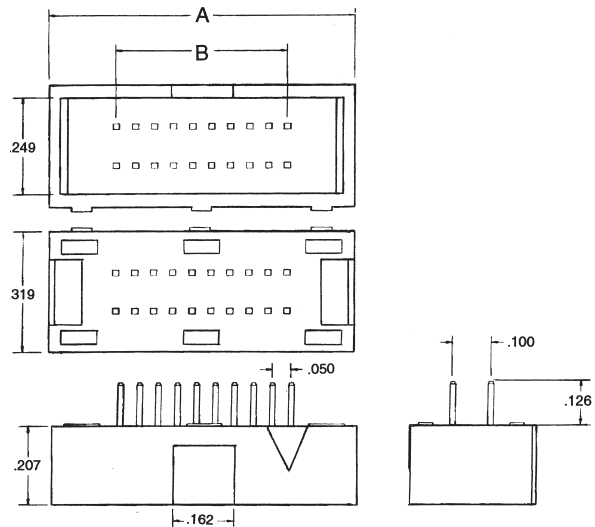

RIGHT ANGLE

