




LATCH HEADERS

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

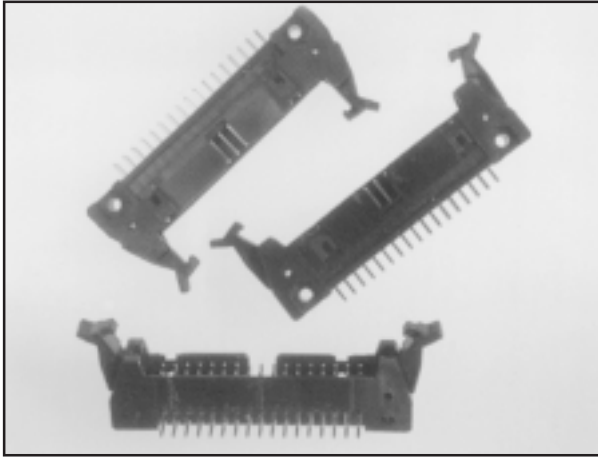

ORDERING INFORMATION

C2H X XX 1 X - XXX
1 2 3 4 5 6

1...Series C2H latched headers

2...Pin Configuration

S...Straight

R...Right angle

3...Number of Pins

10, 14, 16, 20, 26, 30, 32, 34, 36, 40, 50, 60, 64

4...Color Code

1...Black

5...Latch Type

0...No latches

1...Short latches

2...Long latches

6...Other Options

Blank...3.30mm pin length on straight and right angle versions

4.40...4.40mm pin length on straight version

4.50...4.50mm pin length on right angle version

SPECIFICATIONS

Insulator Material: Thermoplastic polyester, UL94V-0

Contact Material: Phosphor bronze

Contact Plating: gold flash over nickel in mating area, tin over nickel in solder area

Operating Temperature Range: -40 degrees C to +105 degrees C



Current Rating: 1 amp

Test Voltage: 1000V eff.





UL FILE NUMBER: E164331


NO. OF CONTACTS	DIMENSIONS (mm)			
	A	B	C	D
10	32.00	27.94	21.04	10.17
14	37.08	33.02	26.12	15.25
16	39.62	35.56	28.66	17.79
20	44.70	40.64	33.74	22.87
26	52.32	48.26	41.36	30.49
30	57.40	53.34	46.44	35.57
34	62.48	58.42	51.52	40.65
36	65.02	60.96	54.06	43.19
40	70.10	66.04	59.14	48.27
50	82.80	78.74	71.84	60.97
60	95.50	91.44	84.56	73.67
64	100.58	96.52	89.62	78.75

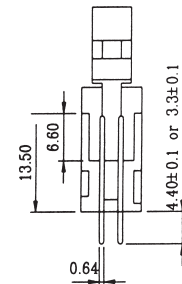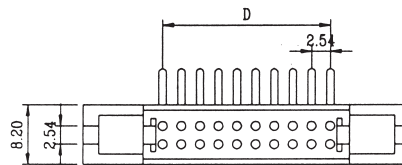


STRAIGHT

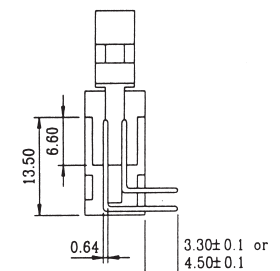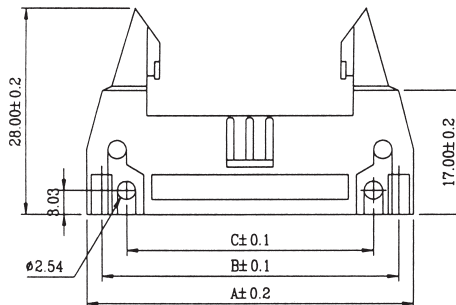

RIGHT ANGLE



SHORT LATCH FOR SOCKETS WITHOUT STRAIN RELIEF



LONG LATCH FOR SOCKETS WITH STRAIN RELIEF