



# SIMM SOCKETS, LOW PROFILE MOUNT

SINGLE AND DUAL ROW, 30 AND 60 POSITIONS

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com  
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

## SPECIFICATIONS

### ELECTRICAL:

**Current Rating:** 1 amp

**Contact Resistance:** 30 milliohms max.

**Insulation Resistance:** 1000 megohms min.

**Operating Temperature Range:** -40 degrees C  
to +125 degrees C

**Capacitance:** 1 pf max.

### MECHANICAL:

**Contact Material:** Phosphor bronze


**Contact Plating:** Tin over nickel

**Insulator Material:** LCP, glass-filled,  
self-extinguishing

**Flammability Rating:** UL94V-0

**Durability:** 30 cycles

**Contact Force:** 200 gr. min.

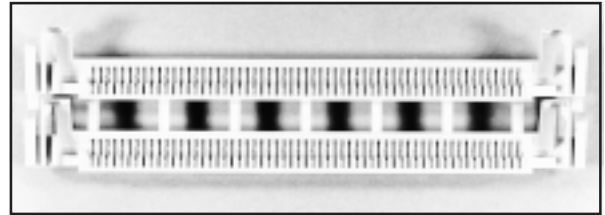

## ORDERING INFORMATION

**CSM - B - X - T - P**

1 2 3 4 5

**1...Series** CSM SIMM sockets

**2...Profile Type**

B...Low profile

**3...Construction Type**

D...Dual row

S...Single row



**4...Contact Finish**

T...Tin




**5...Latch Style**

M...Metal latches


### SINGLE ROW

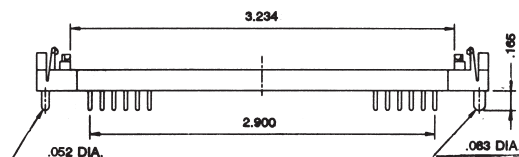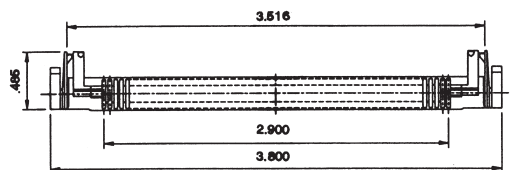

### DUAL ROW

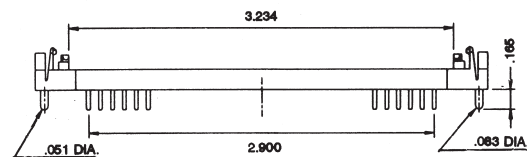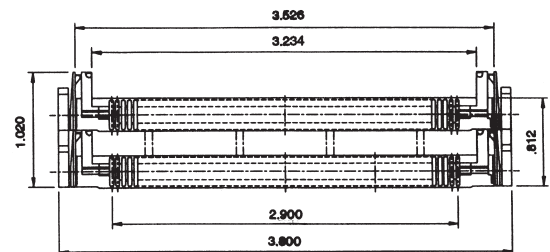

### PCB LAYOUT



### PCB LAYOUT