



IEEE 1394 CABLE ASSEMBLY

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

ORDERING INFORMATION

C1394A - XX


1 2

1...Series C1394 Cable assembly

2...Length In Inches


MATERIAL LIST

1. **Cable:** UL 20276 30AWG x 2P + 24AWG x 2C
Shield: Braid + AL-Foil/Mylar
O.D. = 5.3±0.1mm
Color: Black
2. 1394 6P Connector (solder type)
Contact: Phosphor bronze
Housing: Thermoplastic, UL94V-0
Housing Color: Black
Shell: Steel
Cover: Steel
Pin Contacts: Brass, gold plate 30μ"
 3. **P.V.C. Molded:** 45P
Color: Black

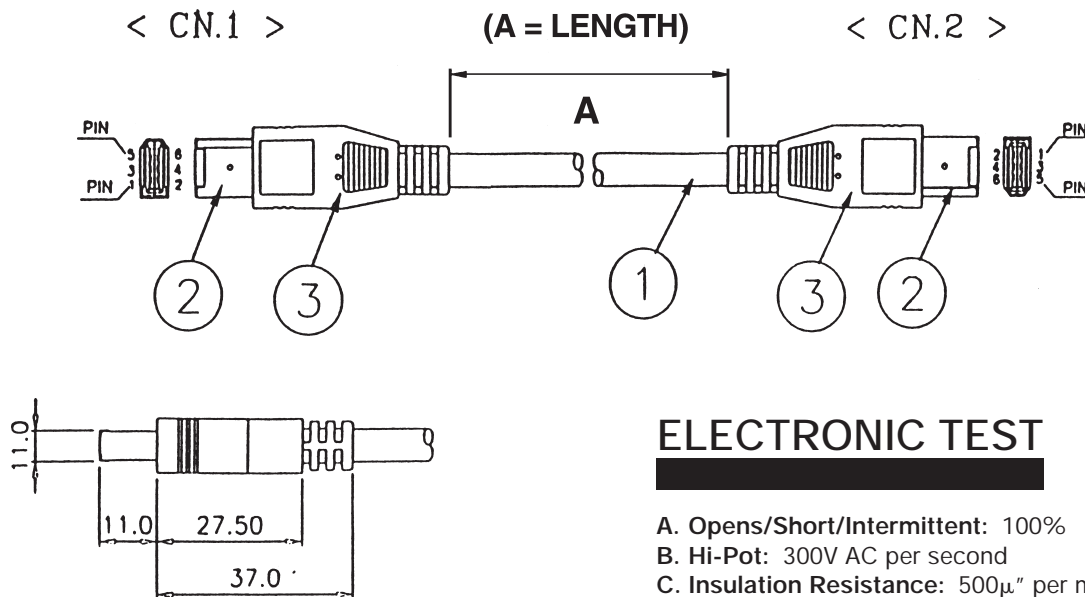

ELECTRONIC TEST

- A. **Opens/Short/Intermittent:** 100%
- B. **Hi-Pot:** 300V AC per second
- C. **Insulation Resistance:** 500μ" per minute
- D. **Contact Resistance:** 2μ" max.



CN.1	COLOR		CN.2
1	WHITE		1
2	BLACK + INSIDE SHIELD		2
3	RED	SHIELDED TWISTED PAIRS	5
4	GREEN		6
5	ORANGE	SHIELDED TWISTED PAIRS	3
6	BLUE		4
SHELL	BRAID		SHELL