

6

5

4

3

2

1




MATERIAL AND FINISH

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated
PDSN-11-1A (wire leads): PVC, 26 AWG
Contact & terminals:
PDSN-11-1C: Brass, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in Polypropylene

ENVIRONMENTAL:

Operating temperature: -5°C to +83°C

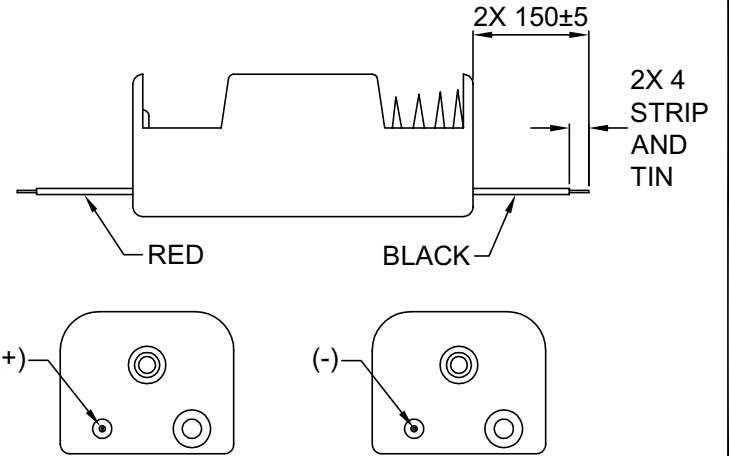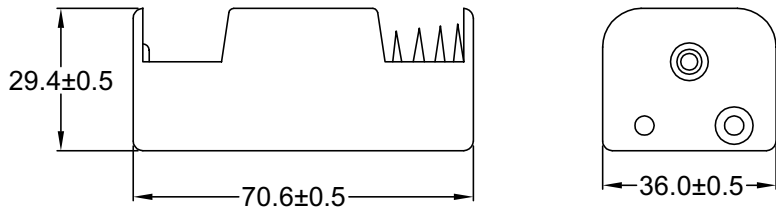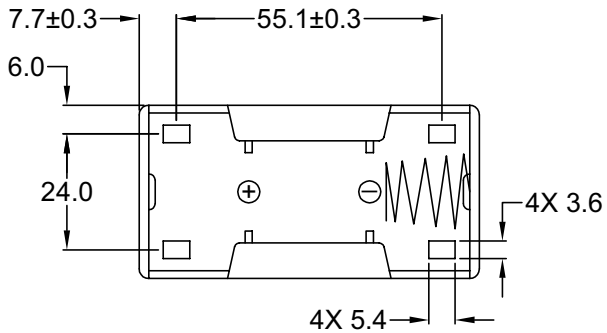

PDSN-11-1A WIRE LEADS

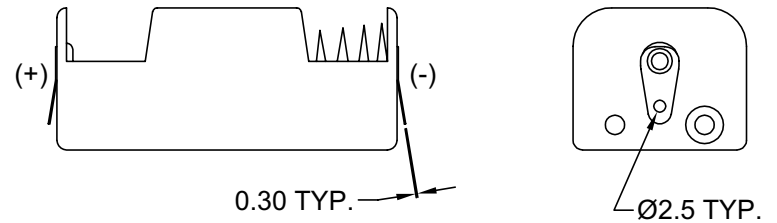

PDSN-11-1C SOLDER LUGS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 1 CELL TYPE "D" BATTERY HOLDER

DRAWN BY	GQ	DATE:	05/24/02
CHECK BY	TD	DATE:	05/30/02
APPR BY	PB	DATE:	05/30/02

PART #:		PDSN-11-1X	SHEET
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY	1 of 1
SCALE:	NTS	DIMENSIONS ARE IN MILLIMETERS	REV:

REVISIONS	CHNG	CHECK	APPR
	CHANGE		
REV	DATE		

6

5

4

3

2

1