

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-11A (wire leads): PVC, 26 AWG

Contact & terminals:

PDSN-11B: Brass, Nickel plated





PDSN-11C: Brass, Nickel plated

PDSN-11D: Steel, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

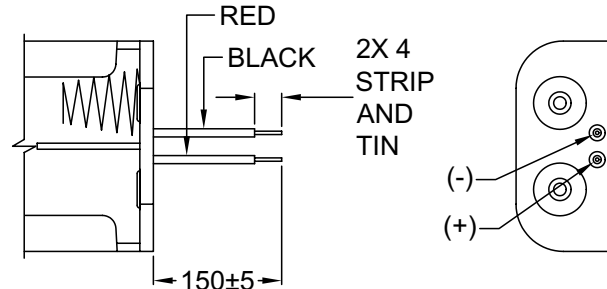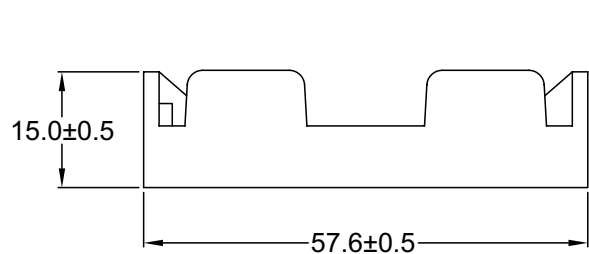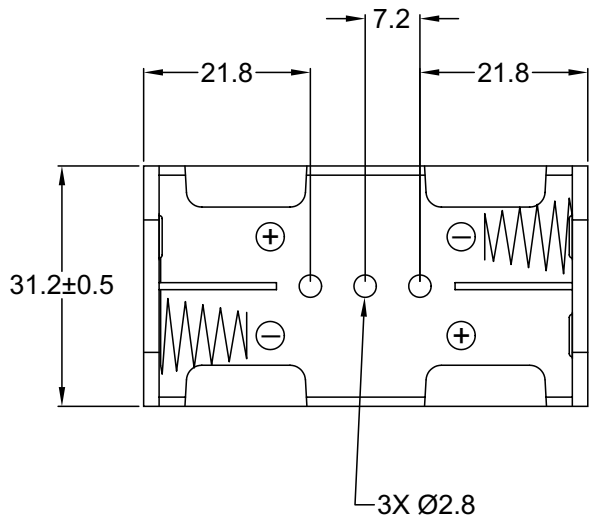


PDSN-11A WIRE LEADS

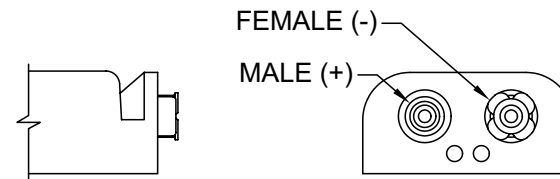

PDSN-11B SNAP TERMINAL

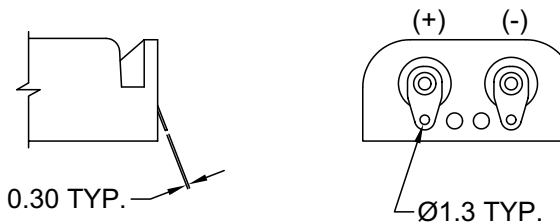

PDSN-11C SOLDER LUGS

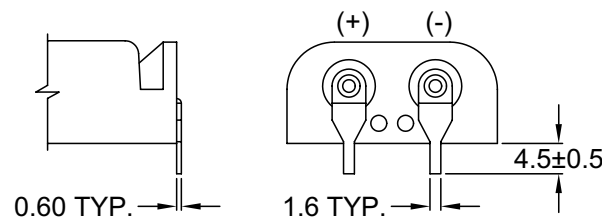

PDSN-11D PCB PINS

Distributed by Electro-Stock, Inc. sales@electrostock.com 630-682-1542 Fax 630-682-1562 http://www.electrostock.com

TOLERANCE UNLESS OTHERWISE SPECIFIED

X ± 1  
X.X ± 0.4  
X.XX ± 0.20

**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 2 CELL TYPE "AA" BATTERY HOLDER SIDE BY SIDE

DRAWN BY	TM	DATE:	3/21/94
CHECK BY	JD	DATE:	3/22/94
APPR BY	SS	DATE:	3/22/94

PART #: PDSN-11X		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: B
SCALE: NTS		

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
A	12/99	UPDATED FORMAT & SPECS	PB	TD	JJ
B	03/27/02	REVISED / UPDATED	GQ	TD	PB

6

5

4

3

2

1