

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-13A (wire leads): PVC, 26 AWG

Contact & terminals:

PDSN-13B: Brass, Nickel plated

PDSN-13C: Brass, Nickel plated


PDSN-13D: Steel, Nickel plated

Spring: Spring Steel, Nickel plated imbedded in Polypropylene


ENVIRONMENTAL:

Operating temperature: -5°C to +83°C


Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

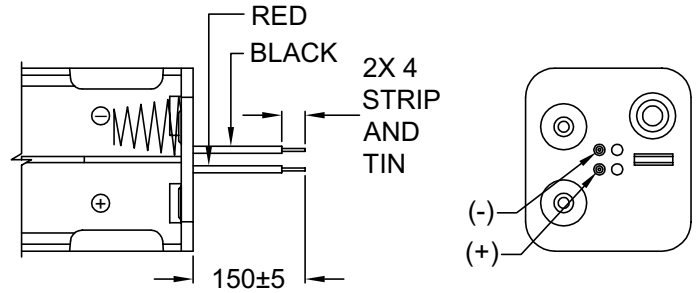


PDSN-13A WIRE LEADS

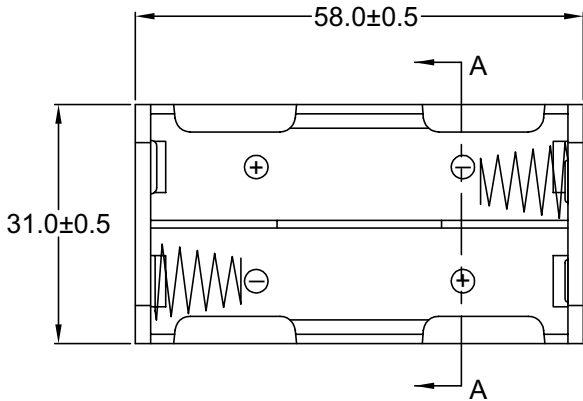


4X "AA" BATTERIES





SECTION A-A

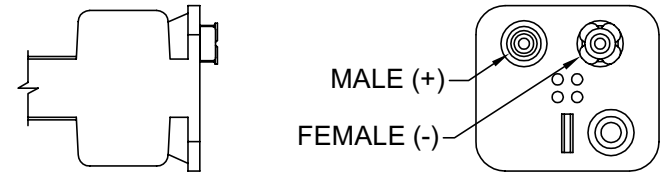


PDSN-13B SNAP TERMINAL

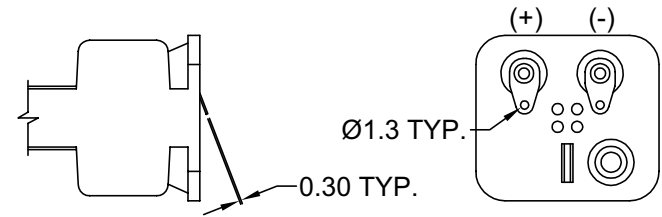

PDSN-13C SOLDER LUGS

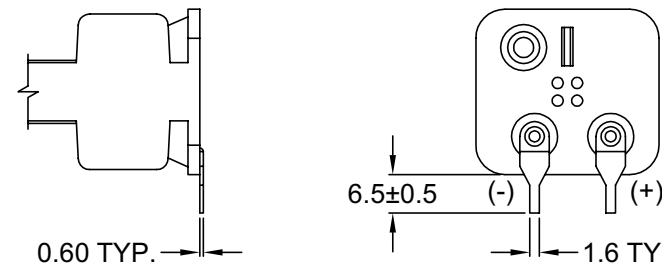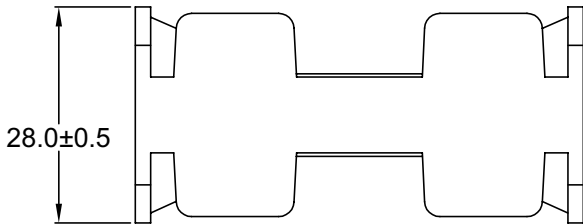

PDSN-13D PCB PINS



RECOMMENDED PCB LAYOUT FOR PDSN-13D

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4 CELL TYPE "AA" BATTERY HOLDER

DRAWN BY	GQ	DATE:	04/03/02
CHECK BY	TD	DATE:	04/24/02
APPR BY	PB	DATE:	04/24/02

PDSN-13X		SHEET 1 of 1
PART #:	SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
SCALE: NTS	REV:	

D

C

B

A

REV	DATE	CHANGE	CHNG	CHK	APPR

6

5

4

3

2

1