

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-14-2A (wire leads): PVC, 26 AWG

Contact & terminals:

PDSN-14-2B: Brass, Nickel plated

PDSN-14-2C: Brass, Nickel plated





Spring: Spring Steel, Nickel plated imbedded in Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

NOTE:


Wire jumper for PDSN-14-2A and PDSN-14-2B

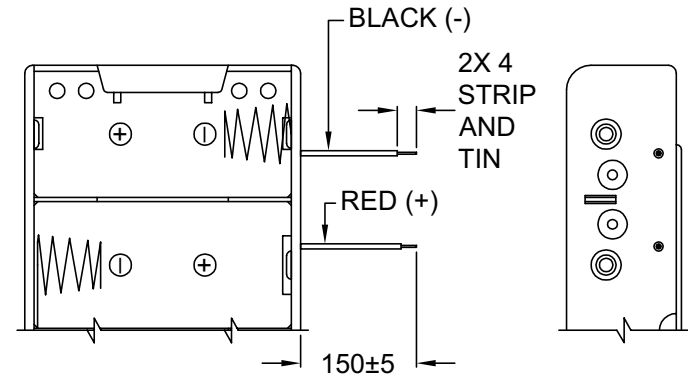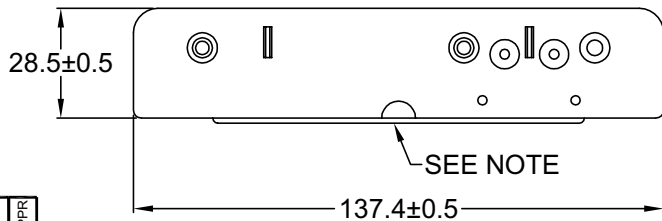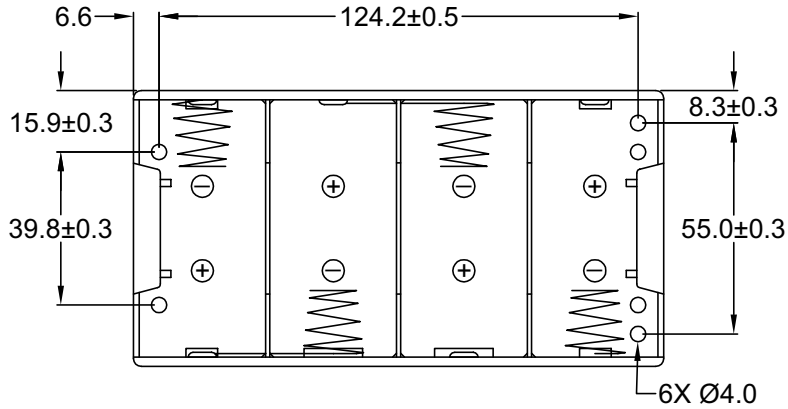

PDSN-14-2A WIRE LEADS

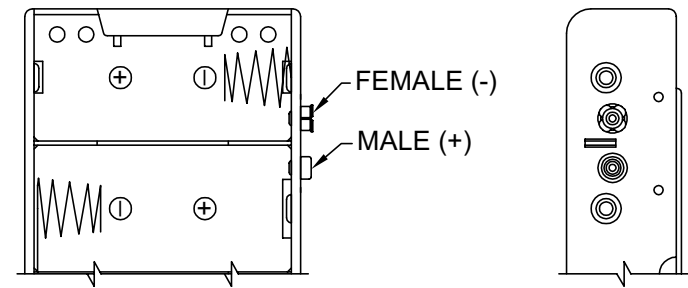

PDSN-14-2B SNAP TERMINAL

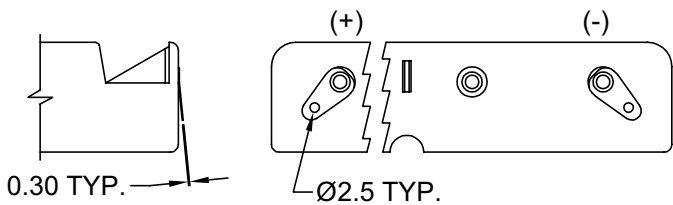

PDSN-14-2C SOLDER LUGS

Distributed by Electro-Stock, Inc. sales@electrostock.com
 630-682-1542 Fax 630-682-1562 http://www.electrostock.com

REVISIONS	CHNG	CHECK	APPR
	CHANGE		
REV	DATE		

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 05/29/02
CHECK BY	TD	DATE: 5/30/02
APPR BY	PB	DATE: 05/30/02

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4 CELL TYPE "D" BATTERY HOLDER

PDSN-14-2X		SHEET 1 of 1
PART #:	SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
SCALE: NTS	REV:	

6

5

4

3

2

1