

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-14A (wire leads): PVC, 26 AWG

Contact & terminals:





PDSN-14B: Brass, Nickel plated

PDSN-14C: Brass, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

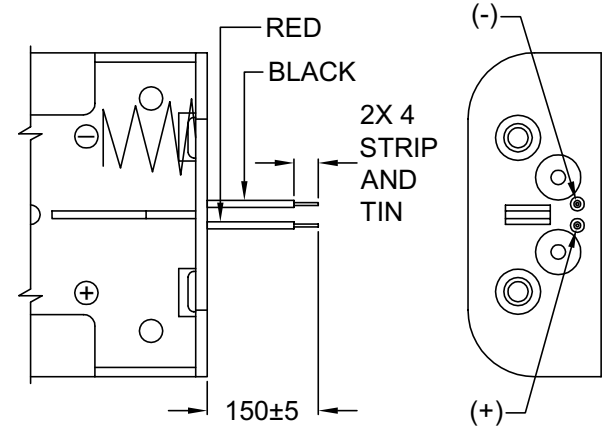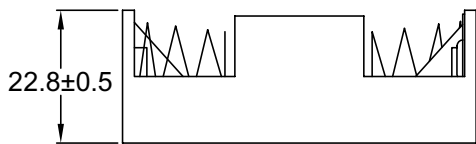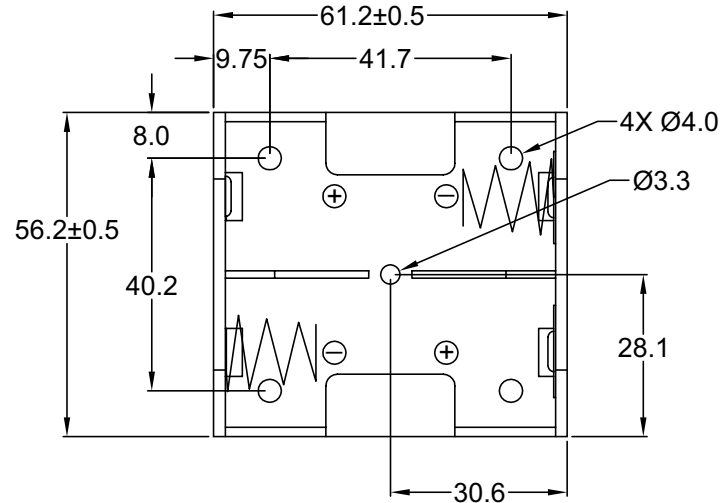

PDSN-14A WIRE LEADS

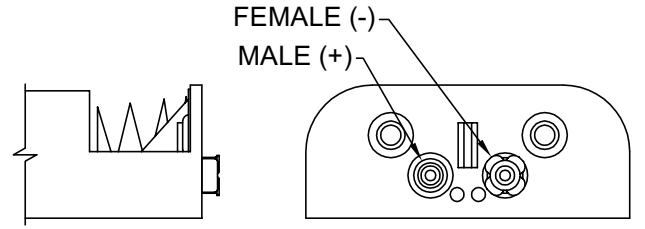

PDSN-14B SNAP TERMINAL

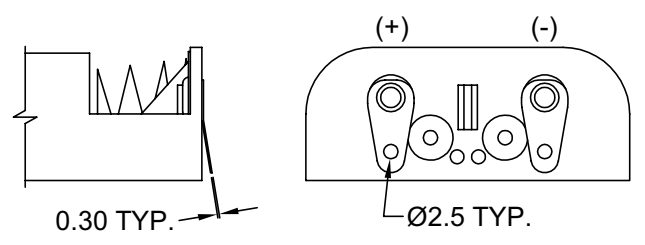

PDSN-14C SOLDER LUGS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 2 CELL TYPE "C" BATTERY HOLDER

DRAWN BY	GQ	DATE:	05/09/02
CHECK BY	TD	DATE:	05/14/02
APPR BY	PB	DATE:	05/14/02

PART #:		PDSN-14X	SHEET
SIZE: A		ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	1 of 1
SCALE: NTS			REV:

REVISIONS	CHNG	CHECK	APPR
	CHANGE		
	REV	DATE	

6

5

4

3

2

1