

6

5

4

3

2

1


MATERIAL AND FINISH

Insulator: Impact resistance Polypropylene, black,
 UL-94V-HB rated
 PDSN-19A (wire leads): PVC, 26 AWG
 Contact & terminals:
 PDSN-19C: Brass, Nickel plated
 PDSN-19D: Steel, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in
 Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

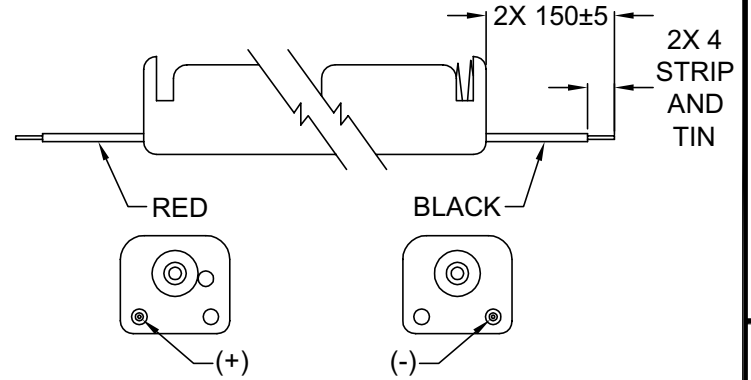





PDSN-19A WIRE LEADS

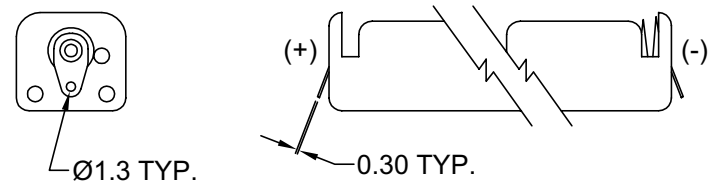

PDSN-19C SOLDER LUGS

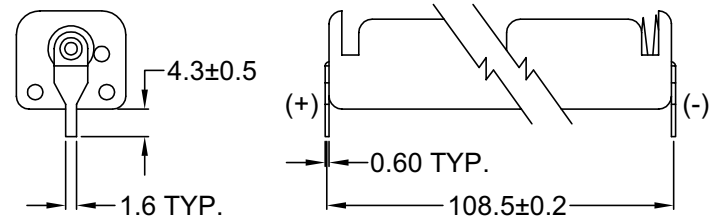

PDSN-19D PCB PINS

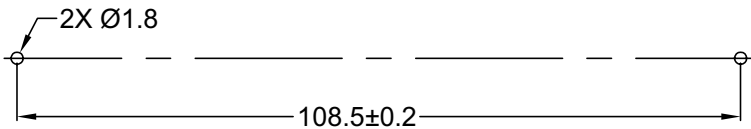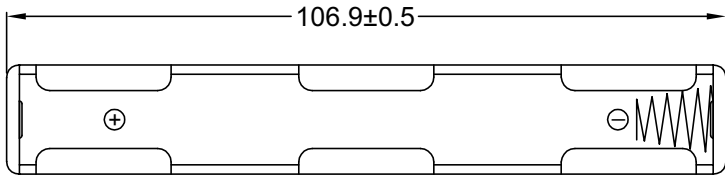

RECOMMENDED
 PCB LAYOUT FOR
 PDSN-19D

Distributed by Electro-Stock, Inc. sales@electrostock.com
 630-682-1542 Fax 630-682-1562 http://www.electrostock.com

| TOLERANCE UNLESS OTHERWISE SPECIFIED | |
|---|--------|
| X | ± 1 |
| X.X | ± 0.4 |
| X.XX | ± 0.20 |

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 2 CELL TYPE "AA" BATTERY HOLDER

| | | | |
|----------|----|-------|----------|
| DRAWN BY | GQ | DATE: | 04/03/02 |
| CHECK BY | TD | DATE: | 04/19/02 |
| APPR BY | PB | DATE: | 04/19/02 |

| | | |
|------------------|--|--------------|
| PART #: PDSN-19X | | SHEET 1 of 1 |
| SIZE: A | ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS | |
| SCALE: NTS | REV: | |

D

C

B

A

6

5

4

3

2

1

| | | | |
|-----------|--------|------|------|
| REVISIONS | CHNG | CHK | APPR |
| | CHANGE | | |
| | REV | DATE | |