

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-23A (wire leads): PVC, 26 AWG

Contact & terminals:






PDSN-23B: Brass, Nickel plated

PDSN-23C: Brass, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

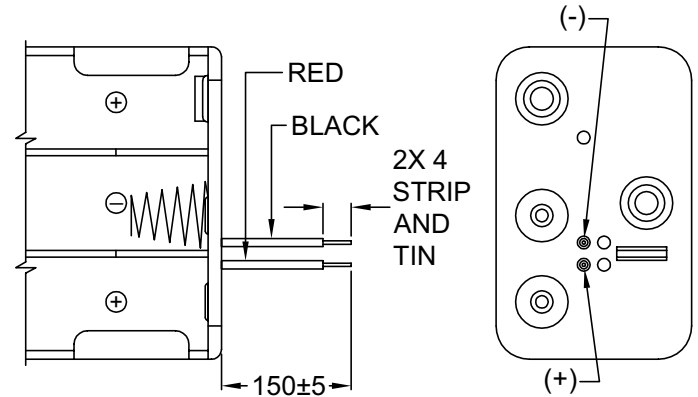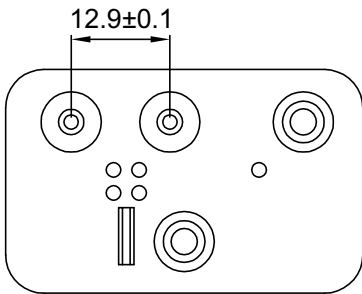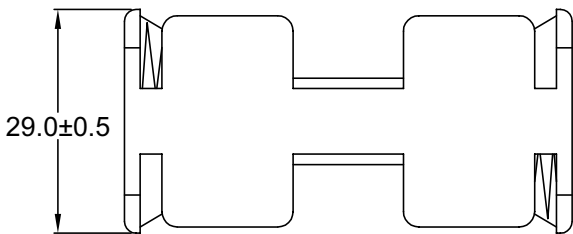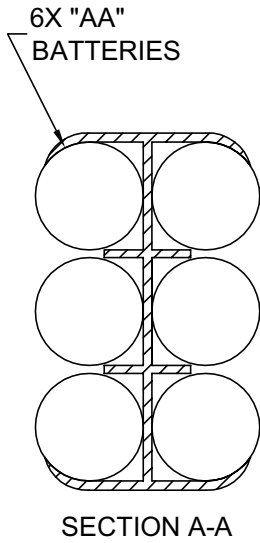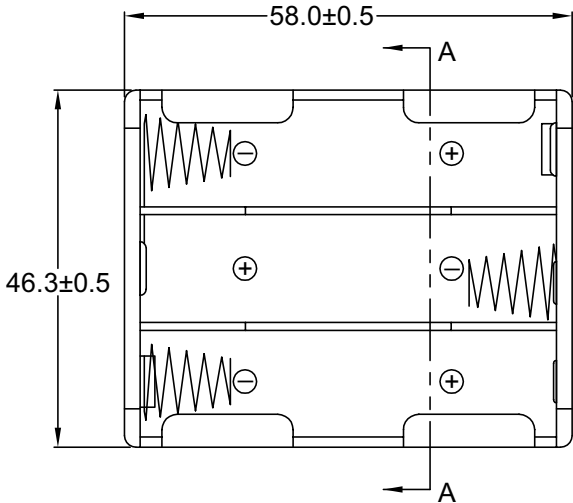

PDSN-23A WIRE LEADS

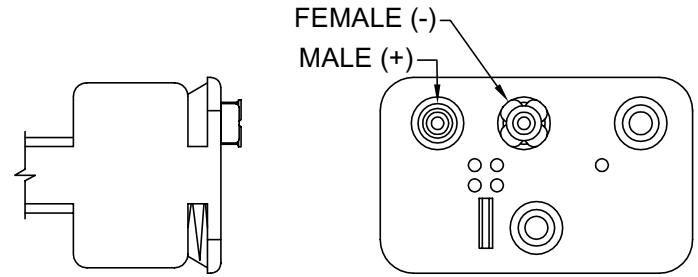

PDSN-23B SNAP TERMINAL

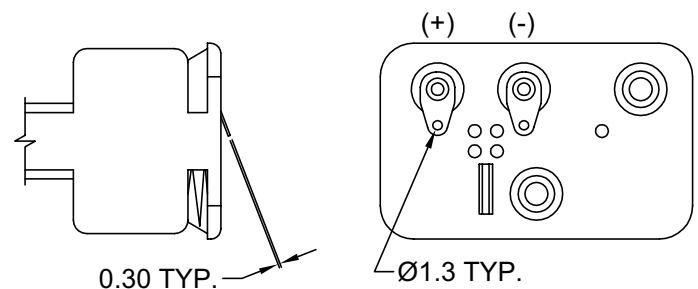

PDSN-23C SOLDER LUGS

Distributed by Electro-Stock, Inc. sales@electrostock.com
 630-682-1542 Fax 630-682-1562 http://www.electrostock.com

TOLERANCE UNLESS OTHERWISE SPECIFIED

X	±	1
X.X	±	0.4
X.XX	±	0.20

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 6 CELL TYPE "AA" BATTERY HOLDER
 SIDE BY SIDE

DRAWN BY	DT	DATE:	4/11/01
CHECK BY	PB	DATE:	4/12/01
APPR BY		DATE:	

PART #: PDSN-23X	
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
SCALE: NTS	

SHEET 1 of 1
 REV: A

D

C

B

A

6

5

4

3

2

1