

6

5

4

3

2


1

MATERIAL AND FINISH


Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated
 PDSN-26A (wire leads): PVC, 26 AWG
 Contact & terminals:
 PDSN-26B: Brass, Nickel plated
 PDSN-26C: Brass, Nickel plated

Spring: Spring Steel, Nickel plated imbedded in Polypropylene




ENVIRONMENTAL:
 Operating temperature: -5°C to +83°C

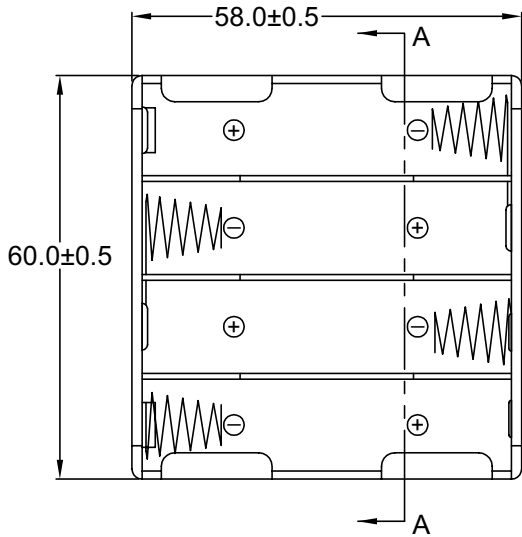


8X "AA" BATTERIES

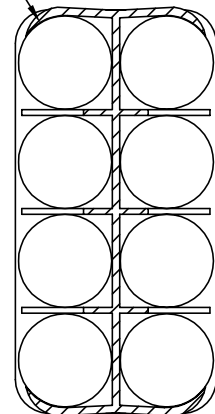


SECTION A-A

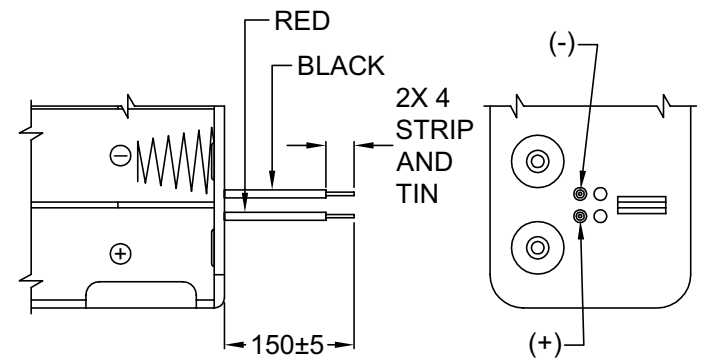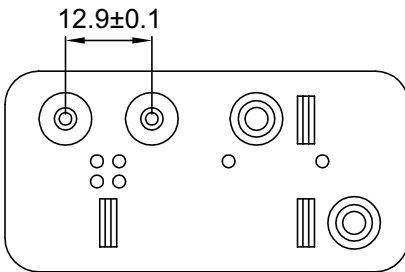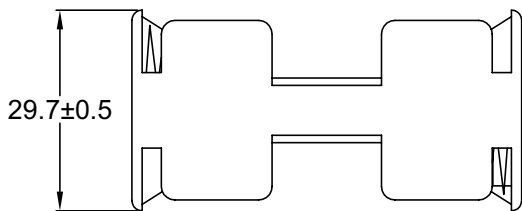

PDSN-26A WIRE LEADS

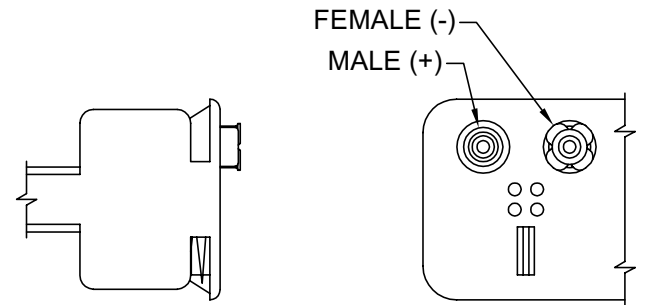

PDSN-26B SNAP TERMINAL

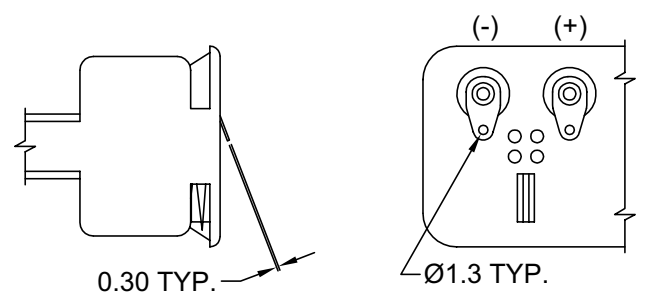

PDSN-26C SOLDER LUGS

Distributed by Electro-Stock, Inc. sales@electrostock.com
 630-682-1542 Fax 630-682-1562 http://www.electrostock.com

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 04/17/02
CHECK BY	TD	DATE: 05/09/02
APPR BY	PB	DATE: 05/09/02

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 8 CELL TYPE "AA" BATTERY HOLDER
 SIDE BY SIDE

PDSN-26X		SHEET 1 of 1
PART #:	SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
SCALE: NTS	REV:	

D

C

B

A

REVISIONS	CHNG	CHECK	APPR
	CHANGE		
REV	DATE		

6

5

4

3

2

1