





**MATERIAL AND FINISH**

Insulator: Thermoplastic, glass filled, black, UL-94V-0 rated.  
 Contacts (Ground): Brass, Nickel plated  
 Solder terminals & Contacts (L & N): Brass, Tin plated.

**ELECTRICAL SPECIFICATIONS:**



Rated current: 10A  
 Rated voltage: 250VAC 

Rated current: 20A  
 Rated voltage: 250VAC 

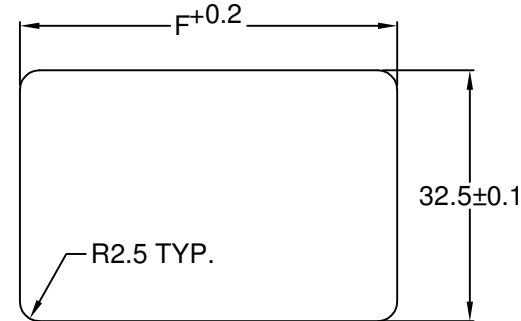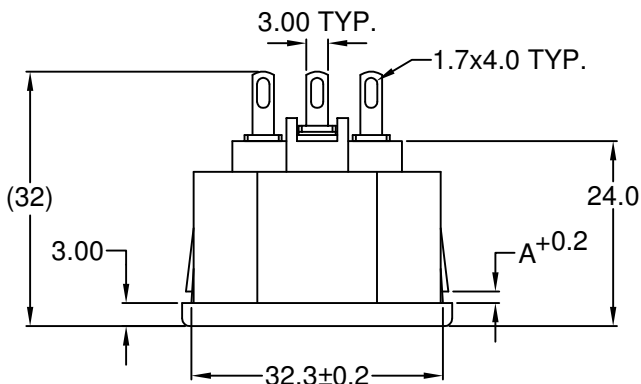

RECOMMENDED  
 PANEL CUTOUT

No of Port	L	E	F
2	51.2	48.0	48.3
3	75.4	72.0	72.2
4	99.6	96.0	96.2
5	123.2	120.0	120.3
6	147.2	144.0	144.4
7	171.2	168.0	168.4

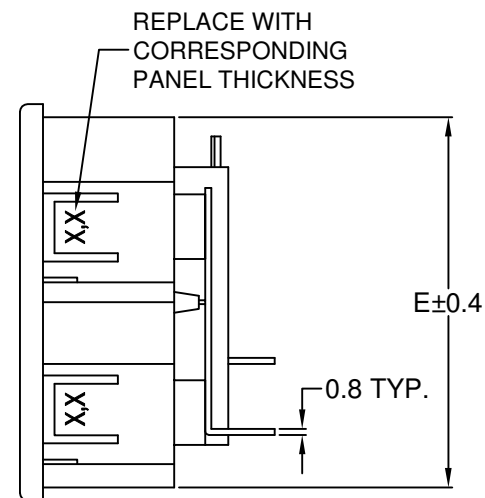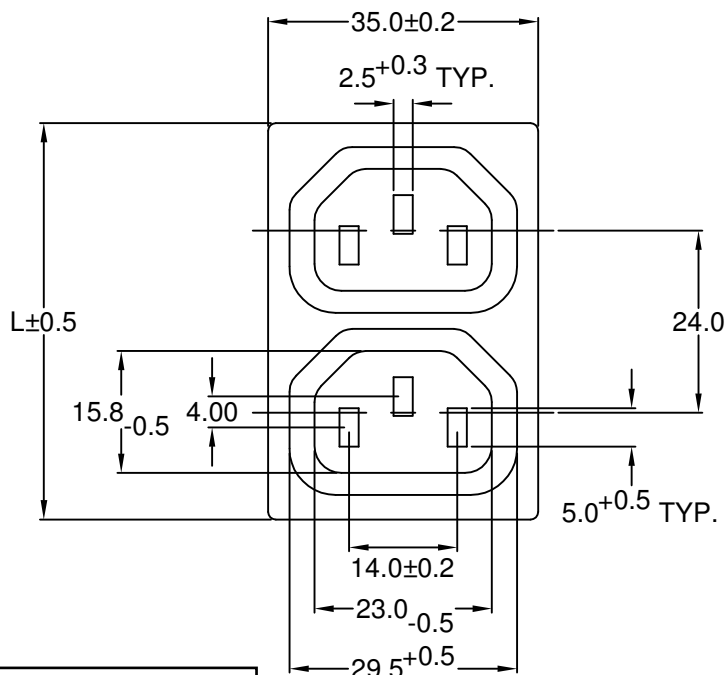

ORDERING CODE:  
 44R02-1 121 - 2

- 1) NO OF PORT (SEE CHART ABOVE)
- 2) PANEL THICKNESS

Distributed by Electro-Stock, Inc. sales@electrostock.com  
 630-682-1542 Fax 630-682-1562 http://www.electrostock.com

P/N	A	MAX. PANEL THICKNESS
44R02-X121-120	1.2	1.2
44R02-X121-150	1.5	1.5
44R02-X121-250	2.5	2.5

ADDITIONAL PANEL THICKNESS  
 AVAILABLE ON REQUEST

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

DRAWN BY	GQ	DATE:	10/26/01
CHECK BY	PB	DATE:	11/06/01
APPR BY	TD	DATE:	11/06/01

**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C13 STRIP APPL. OUTLET; SNAP-IN, SOLDER TERMINAL WITH 1.7x4.0 SLOT

PART #: <b>44R02-X121-XXX</b>		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: <b>D</b>
SCALE: NTS		

REV	DATE	CHANGE	CHNG CHECK APPR		
			TD	PB	PB
A	8/6/03	UPDATED DIM. & CHART			
B	9/24/03	ADD 1.2mm PANEL THICKNESS			
C	5/27/04	REVISED & UPDATED			
D	1/24/05	CHANGE CURRENT RATING, SOLDER WELD			

D

C

B

A