

6

5

4

3

2

1

MATERIAL AND FINISH

Housing: Nylon 66, UL-94V2 rated


ELECTRICAL SPECIFICATIONS:

Current rating: 3A

Voltage rating: 250V AC, DC

Insulation resistance: 1000 Megaohm min @ 500 VDC

Dielectric withstanding strength: 1000 VAC rms for 1 minute


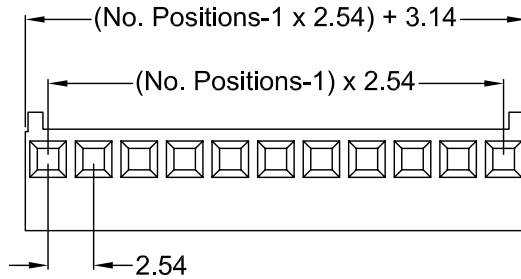


ENVIRONMENTAL:

Operating temperature: -25°C TO 85°C.

NOTE:

Require crimp terminal (part# TCC-REEL) mates to part#'s TCP-0XX & TRP-0XX

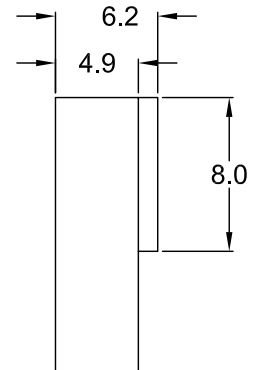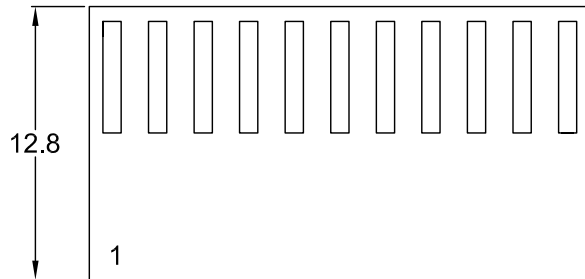

REVISIONS	REV	DATE	CHANGE	CHK	CHK	APPR
	A	5/15/03	UPDATED	TD	PB	

Distributed by Electro-Stock, Inc. sales@electrostock.com
 630-682-1542 Fax 630-682-1562 http://www.electrostock.com

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	TD	DATE: 01/06/99
CHECK BY	AH	DATE: 01/06/99
APPR BY	SS	DATE: 01/06/99

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: HEADER SOCKET HOUSING
 2.54mm PITCH, 2 ~ 20 POSITIONS

TCC-0XX

SIZE: A
 SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1
 REV: A

6

5

4

3

2

1