

6

5

4

3

2

1

MATERIAL AND FINISH

Contacts: Brass, 70u" Tin over Nickel

MECHANICAL SPECIFICATIONS:

Crimp Strength: 8Kgs min. with 18AWG wire


Terminal Retention: 9Kgs min.

ELECTRICAL SPECIFICATIONS:


Rated Current: 5A

Voltage Rating: 250VAC


Contact Resistance: 10 mohm Max.

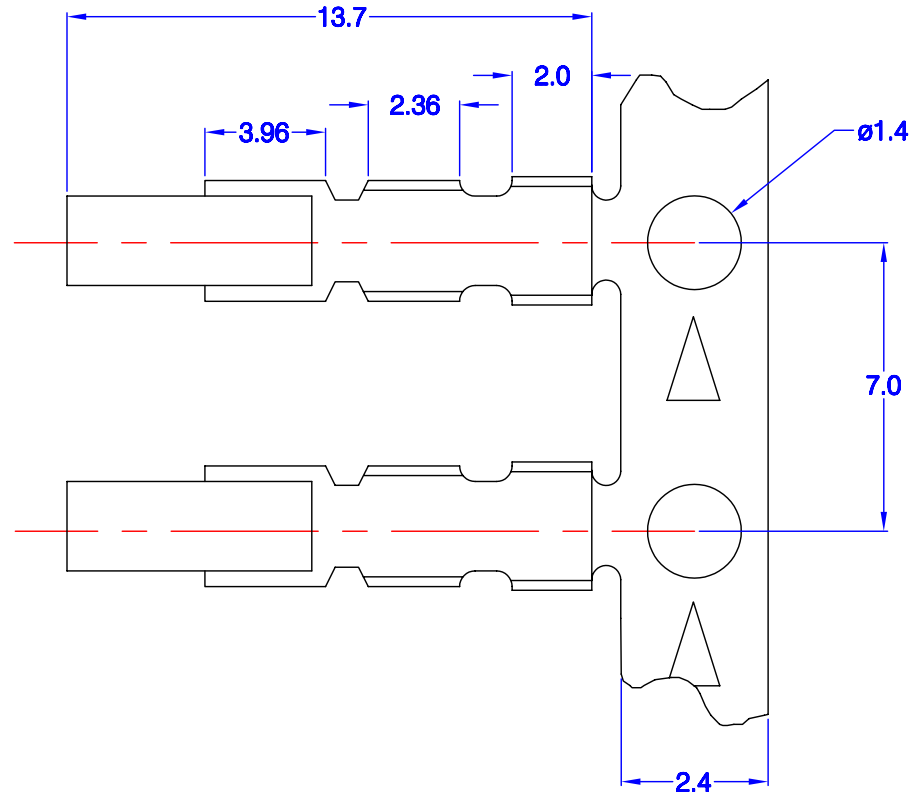


Distributed by Electro-Stock, Inc. sales@electrostock.com
 630-682-1542 Fax 630-682-1562 http://www.electrostock.com



SECTION B-B



SECTION A-A

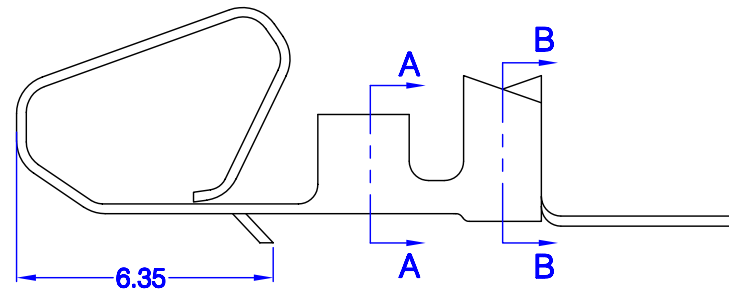

NOTE:
 ACCEPTS AWG-18 TO AWG-22 WIRE
 FOR USE WITH PART# TCC-0XX-396

REV	DATE	A	4/18/00	CHNG	CHECK	APPR
				CHANGE	UPDATED	DRAWING
				PB		

TOLERANCE UNLESS OTHERWISE SPECIFIED X ± 1 XX ± 0.4 XXX ± 0.20	
DRAWN BY: SOKOLI	DATE: 12/7/94
CHECK BY:	DATE:
APPR BY:	DATE:

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: POWER PIN CRIMP TERMINAL
 REEL 3.96mm PITCH

PART #: TCC-REEL-396		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: A
SCALE: NTS		

6

5

4

3

2

1