


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP

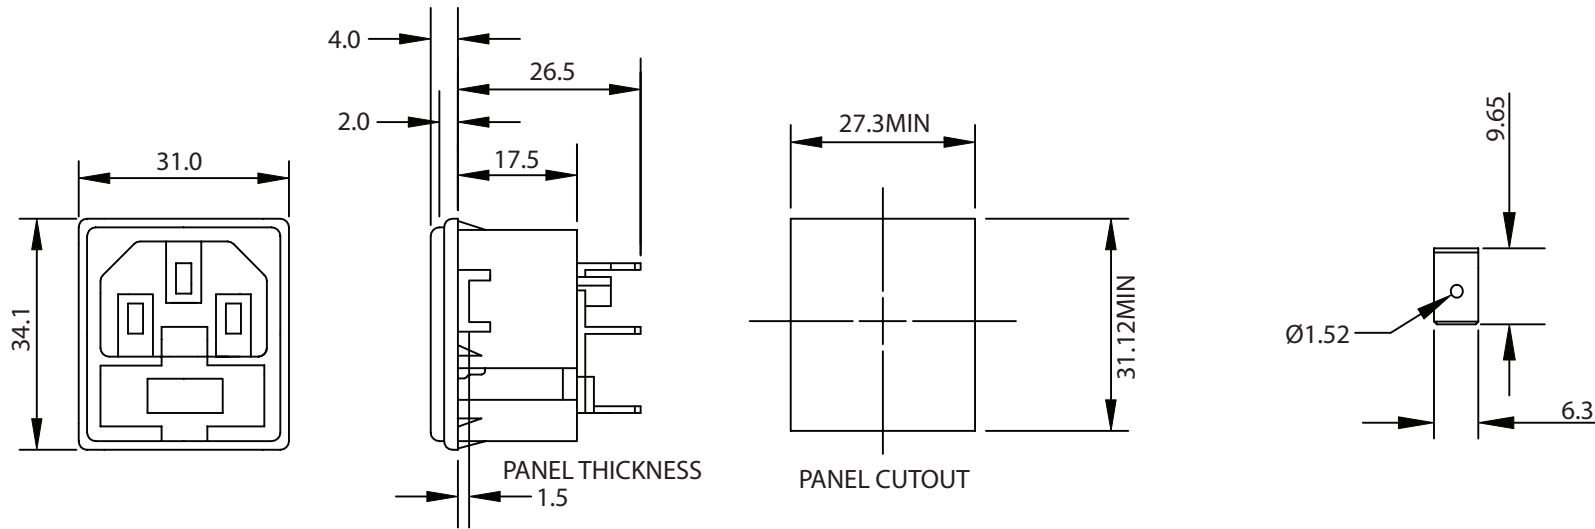

NOTES:

MAX RATING: 10A 250V AC
 CONTACT RESISTANCE: <10 m OHM 9<15 OHM INCLUDING FUSEHOLDER
 INSULATION RESISTANCE: >10³ M OHM
 A.C. BREAKDOWN: POLE-POLE 5.5kV.
 POLES-PANEL 4.0kV
 OPERATING TEMPERATURE: -40 °C TO 70 °C
 MAX. PIN TEMPERATURE: +65 °C
 MATERIALS: NYLON, FLAMMABILITY RATING UL 94 V-0
 CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED

DUAL FUSE HOLDER, ONE ACTIVE, ONE SPARE
 FUSES NOT INCLUDED - RECOMMENDED SIZE: 5 X 20mm

RoHS COMPLIANT

Distributed by Electro-Stock, Inc. sales@electrostock.com
 630-682-1542 Fax 630-682-1562 http://www.electrostock.com

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number:	723-15/63	
0-1	0.15	Description: SNAP-IN INLET WITH FUSEHOLDER		
1-6	0.20			
6-18	0.30	UNIT: mm	REV. B	
18-50	0.50	Drawn / Date	Checked / Date	Approved / Date
50-120	0.70	B.Zhang 01-22-03	01-22-03	JJH / 01-22-03
120-250	0.90			
250-500	1.20			