


Parameter	Value						Units
	15	03	06	09	12	24	
Version	15	03	06	09	12	24	
Rated Voltage	1.5	3	6	9	12	24	VDC
Operating Voltage	1.3 - 2	2 - 4	4 - 8	6 - 12	9 - 15	15 - 27	VDC
Rated Current Max.*	20	25					mA
Sound Pressure Level Min.**	70	75					dBA
Frequency	400 +/- 100						Hz.
Operating Temp. Range	-20 to +60						°C
Storage Temp. Range	-30 to +70						°C

* At rated voltage
 ** At rated voltage @ 20cm.

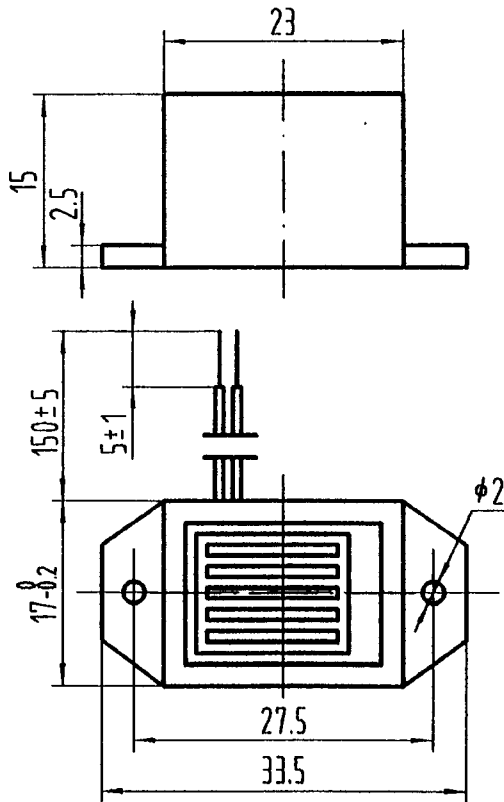

Distributed by Electro-Stock, Inc.
 sales@electrostock.com
 630-682-1542
 Fax 630-682-1562
 http://www.electrostock.com

TRIE-23xxL E/M Buzzer		
SCALE: Not to Scale	APPROVED BY:	DRAWN BY EDP
DATE: 8/98		REVISED
Transducers-USA Elk Grove Village, IL, USA		
		DRAWING NUMBER