


Distributed by Electro-Stock, Inc.
 sales@electrostock.com
 630-682-1542 Fax 630-682-1562
 http://www.electrostock.com

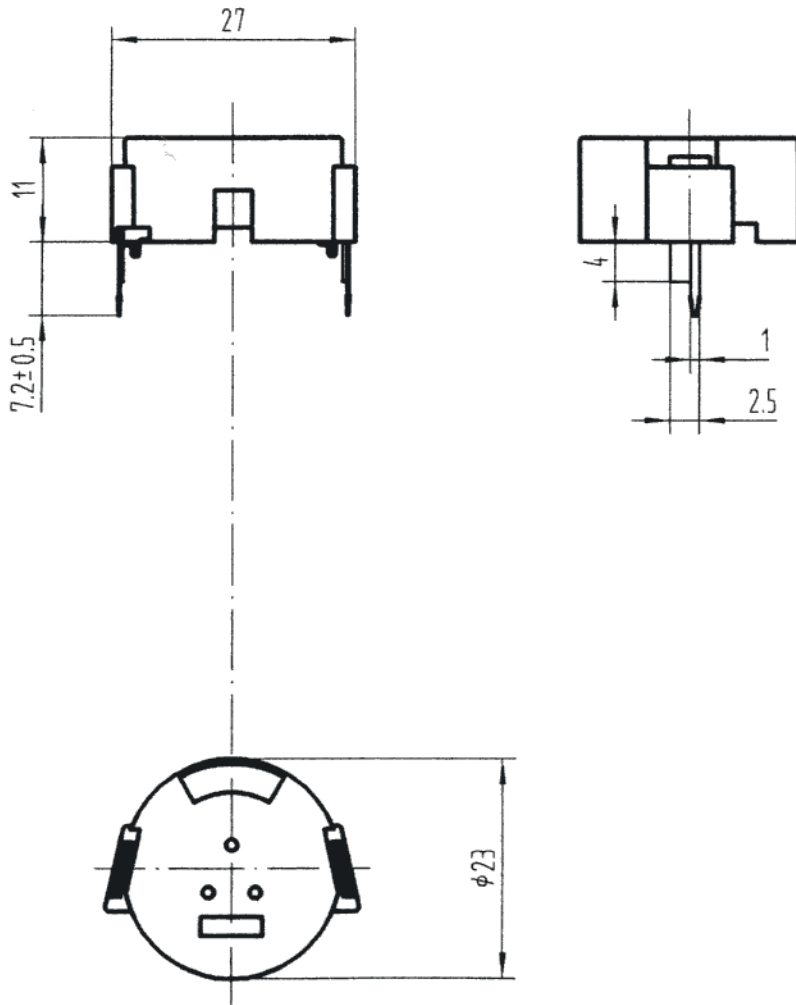

Parameter	Value	Units
Rated Voltage	12V Square Wave	Vp-p
Maximum Voltage	30V Square Wave	Vp-p
Sound Pressure Level	78 Min.*	dBa
Current Consumption	3.5 Max.*	mA
Resonant Frequency	2.5 +/-0.5	KHz.
Capacitance	30,000@120Hz.	pF
Operating Temp. Range	-20 to +60	°C
Storage Temp. Range	-30 to +70	°C

* Value applying rated voltage at resonant frequency

TRTP-2421P Piezo Audio Transducer		
SCALE: Not to Scale	APPROVED BY:	DRAWN BY EDP
DATE: 4/01		REVISED
Transducers-USA Elk Grove Village, IL. USA		
		DRAWING NUMBER