



# D-SUB, HIGH DENSITY, SOLDER CUP

CENTURY INTERCONNECT PRODUCTS


Distributed by Electro-Stock, Inc. sales@electrostock.com  
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

## ORDERING INFORMATION

**C6D 26 S 1 A**  
1 2 3 4 5 6

- 1... **Series** High density solder cup  
D-sub connector
- 2... **Number of Contacts**  
15, 26, 44, 62, 78
- 3... **Contact Type**  
P... Plug  
S... Socket
- 4... **Metal Shell Finish**  
1... Tin (standard)  
2... Yellow chromate
- 5... **Mounting Options**  
See page A-36
- 6... **Plating Options**  
Blank... selective gold flash

Contacts accept 24 to 30 AWG wire.

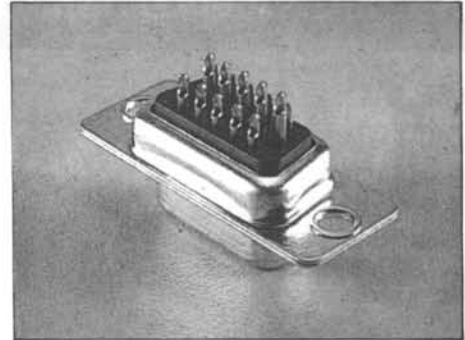

No. of Contact Positions	A ± 0.010 ± 0.25	B ± 0.005 ± 0.13	C ± 0.015 ± 0.38	D ± 0.010 ± 0.25	E ± 0.015 ± 0.38
15	<u>0.643</u> 16.33	<u>0.984</u> 24.99	<u>1.213</u> 30.81	<u>0.759</u> 19.28	<u>0.429</u> 10.90
26	<u>0.971</u> 24.66	<u>1.312</u> 33.32	<u>1.541</u> 39.14	<u>1.083</u> 27.51	<u>0.429</u> 10.90
44	<u>1.511</u> 38.38	<u>1.852</u> 47.04	<u>2.088</u> 53.04	<u>1.625</u> 41.28	<u>0.429</u> 10.90
62	<u>2.159</u> 54.84	<u>2.500</u> 63.50	<u>2.729</u> 69.32	<u>2.272</u> 57.71	<u>0.429</u> 10.90
78	<u>20.732</u> 52.66	<u>2.406</u> 61.11	<u>2.634</u> 66.90	<u>2.177</u> 55.30	<u>0.429</u> 10.90

