



# IDC SCSI III D-SUB (male)

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com  
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

■ Mass Termination to .025 Pitch Flat Ribbon Cable

## ORDERING INFORMATION

**C15F A - XX - P - 1 - X - X**  
1 2 3 4 5 6 7

1...Series C15F IDC SCSI III D-sub (male)

2...Shell

A...All plastic

3...Number of Contacts

50, 68

4...Contact Type

P...Plug

5...Color Code

1...Black

6...Strain Relief

N...Without strain relief

P...Plastic strain relief



7...Plating Options

Blank...Selective gold flash

1...Gold flash

4...15μ" gold

5...30μ" gold

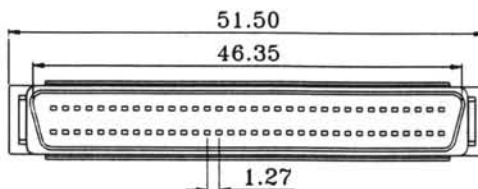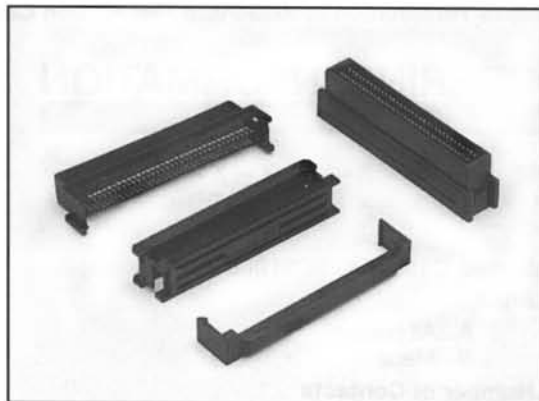

## SPECIFICATIONS

### ELECTRICAL:

**Current Rating:** 1 amp

**Contact Resistance:** 15 milliohms max.

**Insulation Resistance:** 500 megohms min.





**Dielectric Withstanding:** 500V AC for one minute

**Operating Temperature:** -40 degrees C to +105 degrees C

### MECHANICAL:

**Contact Material:** Phosphor bronze

**Insulator Material:** PBT, UL94V-0

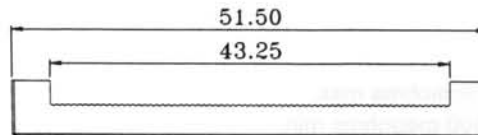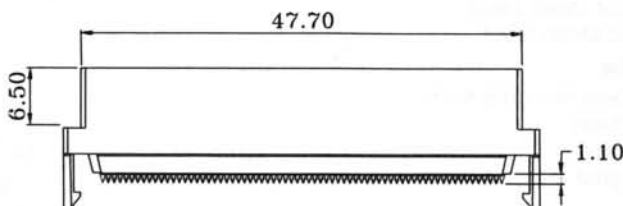

Position	A	B	C
50	40.30	30.48	36.40
68	51.60	41.91	47.75